


NON-ASBESTOS 3MM ANSI150LB FULL FACE GASKET

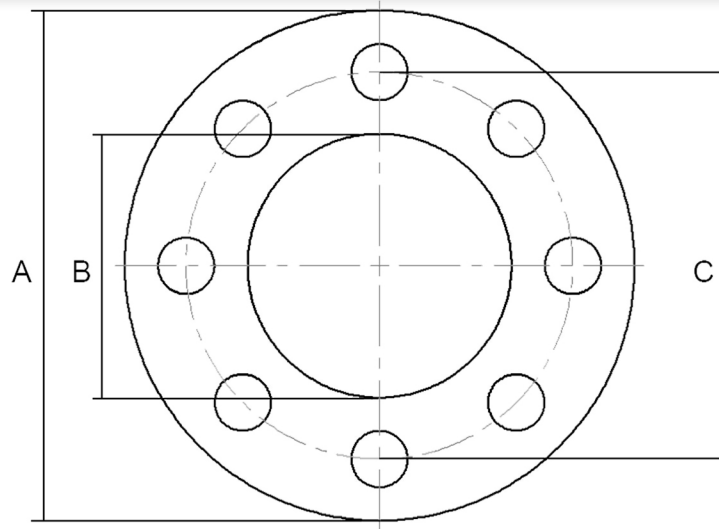

PIPE SIZE	DN	PART No	C	B	A	HOLES
1/2	15	GN0.5150FF3	60.3	22.3	88.9	4X15.9
3/4	20	GN0.75150FF3	69.8	27.7	98.4	4X15.9
1	25	GN1.0150FF3	79.4	34.5	107.9	4X15.9
1 1/4	32	GN1.25150FF3	88.9	43.2	117.5	4X15.9
1 1/2	40	GN1.5150FF3	98.4	49.5	127.0	4X15.9
2	50	GN2.0150FF3	120.6	62.0	152.4	4X19.0
2 1/2	65	GN2.5150FF3	139.7	74.7	177.8	4X19.0
3	80	GN3.0150FF3	152.4	90.7	190.5	4X19.0
4	100	GN4.0150FF3	190.5	116.1	228.6	8X19.0
5	125	GN5.0150FF3	215.9	143.8	254.0	8X22.2
6	150	GN6.0150FF3	241.3	170.7	279.4	8X22.2

Description:

PG-O is a good quality grade of compressed non-asbestos sheet material based on Aramid and Inorganic fibre with a high quality Nitrile binding system.


Application:

PG-O is a high performance gasket material with excellent mechanical properties. The material is suitable for a wide range of fluids including water, steam, oils, fuels and hydrocarbons.

Typical Physical Properties:

Thickness		3mm
Density		1.90 g/cc
Tensile Strength	ASTM F152	12 MPa
Compression	ASTM F36 J	7% to 12%
Recovery	ASTM F36 J	60%
Residual Stress	BS7531 (40N/mm ² @ 300°C)	23 MPa
Gas Leakage	BS7531	<0.5 ml/min
ASTM Oil 1	ASTM F146	2.5%
ASTM Oil 3	ASTM F146	5.0%
ASTM Fuel B	ASTM F146	4.0%

Service:

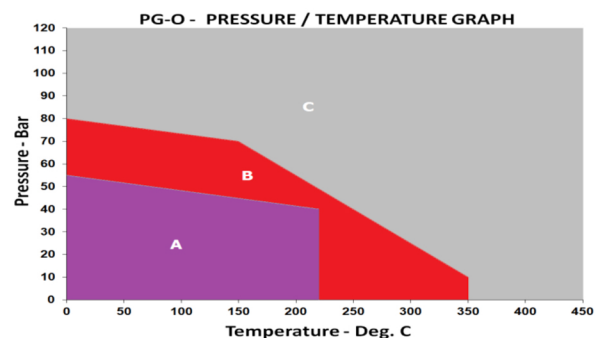

****DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL****