


REDUCING HOSETAIL BSPT 316L

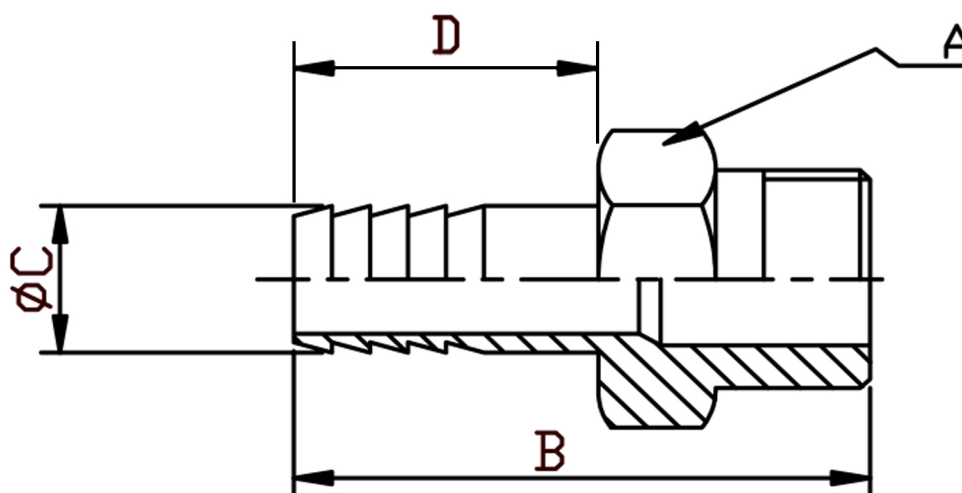

SIZE THREAD	SIZE C HOSE	PART No	A	B	D	Kg/100
1/4	3.50	RHT0204	13.9	35	20	1.98
1/4	5.00	RHT0304	13.9	42	25	2.64
1/8	6.30	RHT0402	12	48	30	3.00
3/8	6.30	RHT0406	19	50	30	3.30
1/2	6.30	RHT0408	23	52	30	4.70
1/8	8.00	RHT0502	11.9	34	18	4.50
1/4	9.50	RHT0604	15	48	30	4.20
1/2	9.50	RHT0608	23	55	30	5.40
1/4	12.70	RHT0804	15	57	40	6.00
3/8	12.70	RHT0806	19	60	40	6.50
3/4	12.70	RHT0812	29	67	40	9.30
1	12.70	RHT0816	35	72	40	10.10
3/4	16.00	RHT1012	29	67	40	11.10
1/2	19.05	RHT1208	23	65	40	11.50
1	19.05	RHT1216	35	72	40	14.90
1/2	25.40	RHT1608	23	72	50	11.80
3/4	25.40	RHT1612	29	76	50	16.50
1-1/4	25.40	RHT1620	45	81	50	18.20
1-1/2	25.40	RHT1624	62	84	50	19.80
1	31.80	RHT2016	35	78	50	16.90
1-1/2	31.80	RHT2024	62	83	50	21.60
1	38.10	RHT2416	41	87	60	25.80
1-1/4	38.10	RHT2420	45	90	60	28.10
2	38.10	RHT2432	72	93	60	34.20
1-1/2	50.80	RHT3224	62	97	60	54.70

*Pressure rating up to 20 BAR (300 PSI)
 *Male threads are BSPT (Taper) to ISO 7-1
 *316 CF8M stainless steel
 *Investment castings
 *Sizes 1/8" to 2"

DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL