


### SQUARE HEAD PLUG BSPT 316L

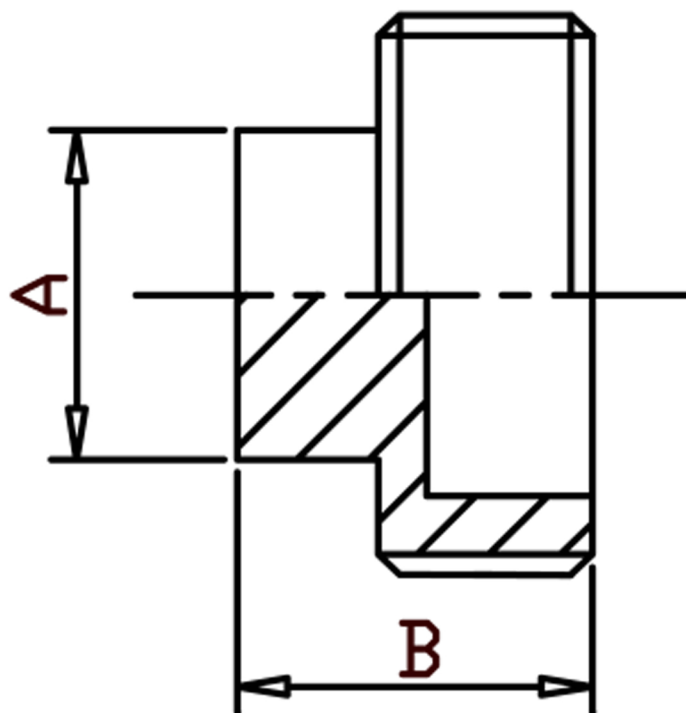

| SIZE  | PART No | A  | B    | Kg/100 |
|-------|---------|----|------|--------|
| 1/8   | SP02    | 7  | 15.5 | 1.15   |
| 1/4   | SP04    | 8  | 19   | 1.60   |
| 3/8   | SP06    | 9  | 18   | 1.55   |
| 1/2   | SP08    | 10 | 18.5 | 2.07   |
| 3/4   | SP12    | 14 | 21   | 3.30   |
| 1     | SP16    | 17 | 24   | 5.61   |
| 1-1/4 | SP20    | 20 | 28   | 9.80   |
| 1-1/2 | SP24    | 23 | 28   | 11.50  |
| 2     | SP32    | 28 | 34   | 19.95  |
| 2-1/2 | SP40    | 36 | 38.5 | 35.20  |
| 3     | SP48    | 40 | 41.5 | 51.50  |
| 4     | SP64    | 52 | 51.5 | 93.04  |

\*Pressure rating up to 20 BAR (300 PSI)  
 \*Male threads are BSPT (Taper) to ISO 7-1  
 \*316 CF8M stainless steel  
 \*Investment castings  
 \*Sizes 1/8" to 4"

**\*\*DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL\*\***