


UNION FEMALE COUPLING

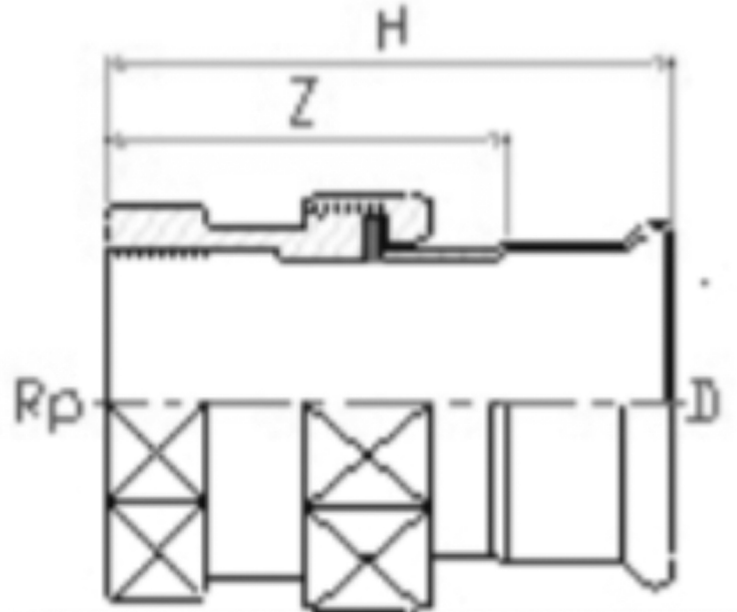

SIZE	PART No	D	Rp	H	Z	WEIGHT
						KG EACH
15x1/2"	PFFU15X1/2BSPP	15	1/2	70	50	0.096
15x3/4"	PFFU15X3/4BSPP	15	3/4	72	52	0.119
18x1/2"	PFFU18X1/2BSPP	18	1/2	72	52	0.1
18x3/4"	PFFU18X3/4BSPP	18	3/4	76	56	0.154
22x3/4"	PFFU22X3/4BSPP	22	3/4	81	60	0.195
22x1"	PFFU22X1BSPP	22	1	82	61	0.234
28x1"	PFFU28X1BSPP	28	1	88	65	0.31
35x1 1/4"	PFFU35X1 1/4BSPP	35	1 1/4	94	68	0.406
42x1 1/2"	PFFU42X1 1/2BSPP	42	1 1/2	99	69	0.543
54x2"	PFFU54X2BSPP	54	2	108	73	0.747

*316L/1.4404 SS

*-35°C to +135°C (EPDM Seal)

*-20°C to +200°C (Optional FPM Seal)

*Maximum 16 BAR Operating pressure

*WRAS/DVGW Approved

*Sizes 15MM to 108MM

*Female threads Parallel Rp to EN10226-1/ISO7-1

*Male threads Taper Rc to EN10226-1/ISO7-1

DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL