




SIZE	CODE		DIMENSIONS		
	BSP	NPT	A	B	KG EACH
1/8	HP02	HP02N	16.8	17.7	0.014
1/4	HP04	HP04N	16.8	17.7	0.021
3/8	HP06	HP06N	18	18.5	0.02
1/2	HP08	HP08N	22	19.5	0.028
3/4	HP12	HP12N	28	22	0.048
1	HP16	HP16N	35	24.8	0.084
1-1/4	HP20	HP20N	44	28.8	0.138
1-1/2	HP24	HP24N	50	28.8	0.164
2	HP32	HP32N	62	33.5	0.272
2-1/4	HP36	-	69	37	0.321
2-1/2	HP40	HP40N	78	34	0.374
3	HP48	HP48N	91	37.5	0.535
4	HP64	HP64N	116	44	0.944

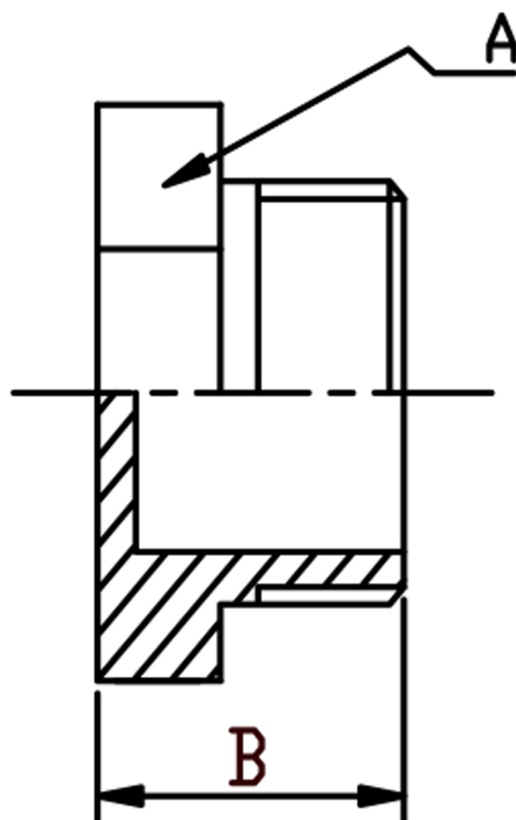

NERO's range of 150lb fittings are available threaded BSP and NPT, or with Socket weld end connections. They are made from high quality investment castings to ISO4144 or above.

BSP threads are to ISO 228-1 and 7-1

NPT threads are to ANSI B2.1

Made from 316 (CF8M) stainless steel

TABLE 1: PRESSURE-TEMPERATURE RATING

TEMPERATURE (°C)	NO-SHOCK MAXIMUM WORKING PRESSURE (Bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

Note 1 Pressure for Intermediate temperatures may be determined by the interpolation method

Note 2 Temperatures indicated are those of the Internal fluid

Note 3 Piping loads, stresses And moments are not taken into account



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: [INFO@NERO.CO.UK](mailto:info@nero.co.uk)

UNIT 2, UNION RD, ANGLO AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK