
TABLE E THREADED FLANGE (316/L)



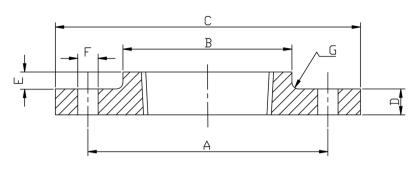

PIPE SIZE	DN	CODE	А	В	С	D	E	F	G	BOLT	KG EACH	BOLT KIT CODE
1/2	15	FESP0.5	66.68	33.34	95.25	6.35	9.53	14.29	1.6	4XM12	0.40	ВК02
3/4	20	FESP0.75	73.03	38.1	101.6	6.35	11.11	14.29	1.6	4XM12	0.59	ВК02
1	25	FESP1.0	82.55	47.63	114.3	7.14	11.11	14.29	1.6	4XM12	0.70	ВК02
1.25	32	FESP1.25	87.31	55.56	120.65	7.94	11.11	14.29	1.6	4XM12	0.79	ВК02
1.5	40	FESP1.5	98.43	61.91	133.35	8.73	12.7	14.29	1.6	4XM12	1.08	BK02
2	50	FESP2.0	114.3	74.61	152.4	9.53	12.7	17.46	1.6	4XM16	1.41	ВК04
2.5	65	FESP2.5	127	90.49	165.1	10.32	15.88	17.46	1.6	4XM16	1.82	ВК04
3	80	FESP3.0	146.05	106.36	184.15	11.11	15.88	17.46	1.6	4XM16	2.48	BK04
4	100	FESP4.0	177.8	133.35	215.9	12.7	19.01	17.46	3.2	8XM16	3.45	BK05

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

This flange conforms to ASTM A182 and is available in 316/L. Threads are BSPP to ISO 228-1

Full material traceablity is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials















CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLO AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK