

PIPE SIZE (N.B)	DN	CODE	C	A	B
10	250	GN10.010FF3	350	395	276.5
12	300	GN12.010FF3	400	445	327.5

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

Description:

PG-O is a good quality grade of compressed non-asbestos sheet material based on Aramid and Inorganic fibre with a high quality Nitrile binding system.

Application:

PG-O is a high performance gasket material with excellent mechanical properties. The material is suitable for a wide range of fluids including water, steam, oils, fuels and hydrocarbons.


Typical Physical Properties:

Thickness		
Density		1.90 g/cc
Tensile Strength	ASTM F152	12 MPa
Compression	ASTM F36 J	7% to 12%
Recovery	ASTM F36 J	60%
Residual Stress	BS7531 (40N/mm ² @ 300°C)	23 MPa
Gas Leakage	BS7531	<0.5 ml/min
ASTM Oil 1	ASTM F146	2.5%
ASTM Oil 3	ASTM F146	5.0%
ASTM Fuel B	ASTM F146	4.0%

Service:



A = Suitable subject to chemical compatibility.
 B = Please contact our Technical Team.
 C = Not Suitable

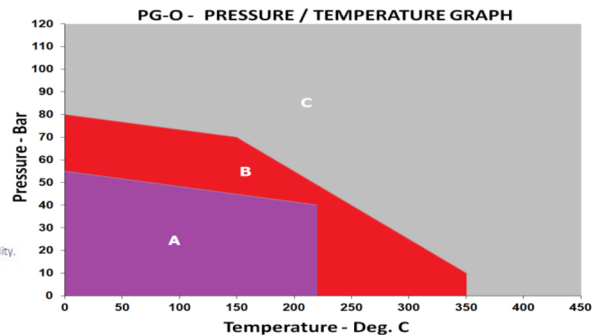

5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK