


S.NO.	COMPONENT	MATERIAL
1	HANDLE SLEEVE	PVC
2	HANDLE	304
3	GLAND NUT	304
4	STEM NUT	304
5	SPRING WASHER	304
6	STEM PACKING	PTFE
7	THRUST WASHER	PTFE
8	JOINT GASKET	PTFE
9	CAP	CF8/CF8M
10	BODY	CF8/CF8M
11	BALL SEAT	RPTFE
12	BALL	CF8/CF8M
13	STEM	304/316

- Pressure rated at 1000 PSI (WOG) - 1/4" -> 2"
- Pressure rated at 800 PSI (WOG) - 2-1/2" -> 4"
- Sizes available from 1/4" up to 4"
- 2-Piece Full Bore / Port
- Threaded Ends: BSPP (ISO 228-1) BSPT (ISO 7.1) NPT (ANSI B2.1)
- Quality investment casting Body & Cap
- Internal entry blow-out proof stem
- Inspection Testing: API 598, / EN12266
- 1/4 turn lockable handle

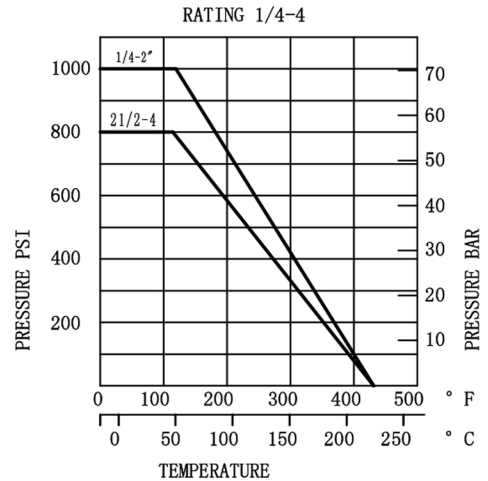

SIZE	PRODUCT CODE			D	L	H	W	S	CV FACTOR	KG EACH
	BSPP	BSPT	NPT							
1/4	FBV04	FBV04T	FBV04N	11.6	48.5	48	91	19	6	0.30
3/8	FBV06	FBV06T	FBV06N	12.5	48.5	48	91	21	7	0.31
1/2	FBV08	FBV08T	FBV08N	15	58	52	91	25.5	10	0.35
3/4	FBV12	FBV12T	FBV12N	20	65	61	111	31	25	0.58
1	FBV16	FBV16T	FBV16N	25	77	65	111	37.5	35	1.04
1-1/4	FBV20	FBV20T	FBV20N	32	90	79	154	46.5	46	1.54
1-1/2	FBV24	FBV24T	FBV24N	38	98	83	154	53.5	80	2.26
2	FBV32	FBV32T	FBV32N	50	121	97	192	66	110	3.80
2-1/2	FBV40	FBV40T	FBV40N	65	145	129	246	82.5	310	6.80
3	FBV48	FBV48T	FBV48N	76	166	138	246	97.5	360	11.58
4	FBV64	FBV64T	FBV64N	94	240	175	317	130	820	16.10

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****



SAME DAY DISPATCH - ORDERS PLACED BEFORE 4:30PM



WEALTH OF INDUSTRY KNOWLEDGE



ONE OF THE LARGEST STOCKISTS IN THE UK