


## ANSI 300LB BLIND FLANGE (316/L)



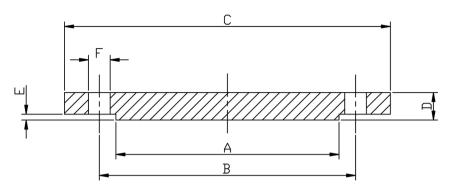

PIPE SIZE	DN	CODE	Α	В	С	D	E	F	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F300B0.5	34.9	66.7	95	14.7	2	15.9	4XM12	0.70	ВК03
3/4	20	F300B0.75	42.9	82.6	115	16.3	2	19.05	4XM16	1.20	BK06
1	25	F300B1.0	50.8	88.9	125	17.9	2	19.05	4XM16	1.50	BK06
1.25	32	F300B1.25	63.5	98.4	135	19.5	2	19.05	4XM16	2.00	BK06
1.5	40	F300B1.5	73	114.3	155	21.1	2	22.23	4XM20	2.90	BK17
2	50	F300B2.0	92.1	127	165	22.7	2	19.05	8XM16	3.40	BK07
2.5	65	F300B2.5	104.8	149.2	190	25.9	2	22.23	8XM20	5.10	BK12
3	80	F300B3.0	127	168.3	210	29	2	22.23	8XM20	7.00	BK12
4	100	F300B4.0	157.2	200	255	32.2	2	22.23	8XM20	11.80	BK12
5	125	F300B5.0	185.7	235	280	35.4	2	22.23	8XM20	15.50	BK12
6	150	F300B6.0	215.9	269.9	320	37	2	22.23	12XM20	21.30	ВК09

<sup>\*\*</sup> DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\*

This flange conforms to ANSI/ASME B16.5 and is available in 316/L.

Full material traceablity is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials











SAME DAY DISPATCH -ORDERS PLACED BEFORE 4:30PM



