


ITEM	COMPONENT	MATERIAL
1	BODY	CF8/CF8M
2	PETAL	CF8/CF8M
3	STEM	304
4	GASKET	PTFE
5	CAP	CF8/CF8M
6	WASHER	304
7	BONNET	CF8/CF8M
8	HAND WHEEL	ALUMINIUM ALLOY
9	NUT	304
10	WASHER	304
11	RING	304
12	STEM PACKING	PTFE



Main Technical Parameter			
Normal pressure	200	PSi	
Test pressure	Shell test pressure	3.8	MPa
	Tightness test	2.8	
	Gas-Tightness test	0.6	
Max working temperature	-20~180	°C	
Applicable medium: water, gas, oil, acid			

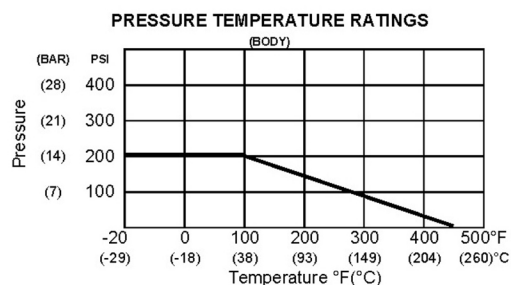

- Sizes available from: 1/4" to 2"
- Pressure rated at 200 PSI / PN16
- Non rising stem
- Threaded ends : BSPP (ISO 228-1) NPT (ANSI B2.1)
- Investment Casting
- Inspection test to API 598, EN12266
- PED97/23/EC (CE0035)

SIZE	PRODUCT CODE BSPP	PRODUCT CODE NPT	D	H	D1	L	CV FACTOR	KG EACH
1/4	GLV04	GLV04N	10	79	65	55	6	0.35
3/8	GLV06	GLV06N	12	79	65	55	12	0.45
1/2	GLV08	GLV08N	15	79	65	67	19	0.50
3/4	GLV12	GLV12N	20	91	77	75	37	0.60
1	GLV16	GLV16N	25	106	77	85	64	0.80
1 1/4	GLV20	GLV20N	32	125	97	101	103	1.24
1 1/2	GLV24	GLV24N	40	136	97	115	143	1.80
2	GLV32	GLV32N	50	146	97	136	360	2.50

**\*\* DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\***



SAME DAY DISPATCH -  
ORDERS PLACED BEFORE 4:30PM



WEALTH OF  
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST  
STOCKISTS IN THE UK