

PIPE SIZE	DN	CODE	A	B	C	D	E	F	G (PITCH)	BOLT	BOLT KIT CODE	KG EACH
1/2	15	FESP0.5	66.70	33.30	95.30	4.76	9.54	14.29	1.814	4XM12	BK02	0.40
3/4	20	FESP0.75	73.00	38.10	101.60	4.76	11.14	14.29	1.81	4XM12	BK02	0.59
1	25	FESP1.0	82.60	47.60	114.30	4.76	11.14	14.29	2.31	4XM12	BK02	0.70
1.25	32	FESP1.25	87.30	55.60	120.60	6.35	11.15	14.29	2.31	4XM12	BK02	0.79
1.5	40	FESP1.5	98.40	61.90	133.40	6.35	12.70	14.29	2.31	4XM12	BK02	1.08
2	50	FESP2.0	114.30	74.60	152.40	7.94	12.76	17.46	2.31	4XM16	BK04	1.41
2.5	65	FESP2.5	127.00	90.50	165.10	7.94	15.86	17.46	2.31	4XM16	BK04	1.82
3	80	FESP3.0	146.00	106.30	184.10	9.53	15.87	17.46	2.31	4XM16	BK04	2.48
4	100	FESP4.0	177.80	133.40	215.90	9.53	19.25	17.46	2.31	8XM16	BK05	3.45


**\*\* DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\***

This flange conforms to ASTM A182 and is available in 316/L. Threads are BSPP to ISO 228-1

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

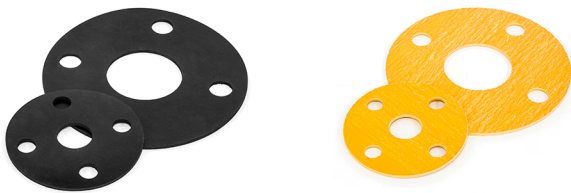

We also keep Blind and Slip-On flanges to this standard

