


PRESSURE TEMPERATURE RATINGS (BODY)

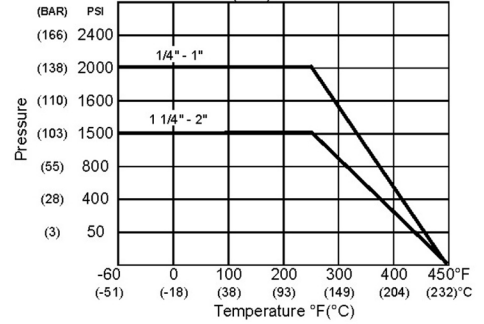

- Pressure rated at 2000 PSI (WOG) - 1/4" --> 2"
- Sizes available from 1/4" up to 2"
- Threaded Ends: BSPP (ISO 228-1)
- Investment casting Body & Cap
- Internal entry blow-out proof stem
- Inspection Testing: API 598, / EN12266
- PED 97/23/PE (CE0035) approved

| S.NO. | COMPONENT | MATERIAL |
|-------|---------------|----------|
| 1 | PLASTIC COVER | PLASTIC |
| 2 | HANDLE | 304 |
| 3 | GLAND NUT | 304 |
| 4 | STEM NUT | 304 |
| 5 | SPRING WASHER | 304 |
| 6 | STEM PACKING | PTFE |
| 7 | THRUST WASHER | PTFE |
| 8 | JOINT GASKET | PTFE |
| 9 | CAP | CF8/CF8M |
| 10 | STEM | CF8/CF8M |
| 11 | BALL SEAT | PTFE |
| 12 | BALL SEAT | CF8/CF8M |
| 13 | BODY | CF8/CF8M |

| SIZE | PRODUCT CODE BSPP | D | L | S | K | T | M | KG EACH |
|-------|-------------------|------|------|------|------|-----|---------|---------|
| 1/4 | DMFBV04 | 11 | 58 | 26.5 | 27.5 | 180 | 10-32UN | 0.50 |
| 3/8 | DMFBV06 | 12.5 | 58 | 26.5 | 27.5 | 180 | 10-32UN | 0.60 |
| 1/2 | DMFBV08 | 12.5 | 58 | 26.5 | 27.5 | 180 | 10-32UN | 0.80 |
| 3/4 | DMFBV12 | 17.5 | 79.6 | 32 | 34.8 | 185 | 10-32UN | 1.00 |
| 1 | DMFBV16 | 22 | 86 | 41 | 34.8 | 185 | 10-32UN | 1.20 |
| 1-1/4 | DMFBV24 | 25 | 103 | 50 | 34.8 | 235 | 10-32UN | 2.30 |
| 1-1/2 | DMFBV32 | 32 | 111 | 55 | 34.8 | 235 | 10-32UN | 3.60 |
| 2 | DMFBV32 | 38 | 137 | 70 | 34.8 | 235 | 10-32UN | 3.60 |

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLA AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK