


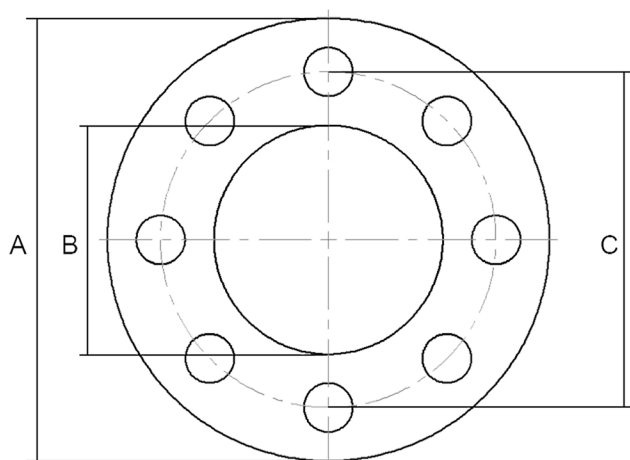

PIPE SIZE (N.B)	DN	CODE	C	A	B
1/2	15	GE0.5300FF3	66.7	95	22.3
3/4	20	GE0.75300FF3	82.6	115	27.7
1	25	GE1.0300FF3	88.9	125	34.5
1.25	32	GE1.25300FF3	98.4	135	43.2
1.5	40	GE1.5300FF3	114.3	155	49.5
2	50	GE2.0300FF3	127	165	62
2.5	65	GE2.5300FF3	149.2	190	74.7
3	80	GE3.0300FF3	168.3	210	90.7
4	100	GE4.0300FF3	200	255	116.1
5	125	GE5.0300FF3	235	280	143.8
6	150	GE6.0300FF3	269.9	320	170.7

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

Material Data Sheet

Material Reference

2349

Colour

BLACK

To Specification

COMMERCIAL

Basic Properties	Value	Test Method	Unit
Base Polymer Type	SBR/EPDM		
Indentation Hardness	60 Shore A -4 +5	ASTM D2240 00	Degrees
Specific Gravity	1.5 +/- 0.05	ASTM D792	g/cm3
Tensile Strength - Minimum	3	ASTM D412	Mpa
Elongation @ Break - Minimum	250	ASTM D412	%
Minimum Continuous Working Temperature	-20		°C
Maximum Continuous Working Temperature	70		°C
Maximum Intermittent Working Temperature	90		°C
Compression Set 70 Degrees 22 Hours	30% Max	ASTM D395 Method B	%
Insertion Type	None		

Guidelines for Use (It is the Customers responsibility to ensure suitability of Use)

Food Use Suitability	Not Recommended
Abrasion Resistance	Moderate
Ozone Weather Resistance	Moderate
Flame Retardency	Not Recommended
Electrical Resistance	Not Recommended
General Purpose	Not Recommended



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLO AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK