


性能 (Performance)
测试流体: 油-200SUS (Test Fluid: oil-200SUS)

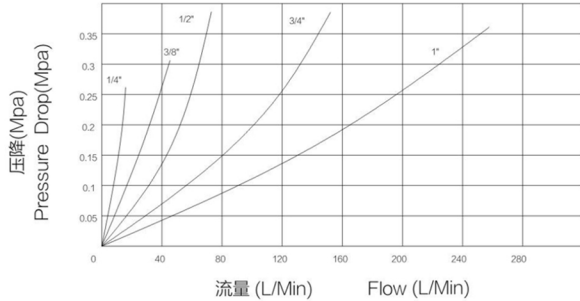

SIZE	CODE	L1	CH1	D1	**TOTAL LENGTH	FLOW (L/min)	KG / 100
1/8	QRC02	48	17	24	59	4	12.0
1/4	QRC04	58	19	28.5	72	11.5	15.0
3/8	QRC06	65	24	35	80	23	23.0
1/2	QRC08	74	28.5	44.5	93	45.5	41.0
3/4	QRC12	92	36	54	113	106	68.0
1	QRC16	103	41	63.5	127	190	104.0

** THIS COLUMN DENOTES THE TOTAL LENGTH WHEN THE NIPPLE CONNECTED TO THE COUPLING

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****

- Available in 304 stainless steel (CF8)
- Sizes available 1/8" up to 1" (DN6 to DN25)
- Viton (FPM/FKM) seals supplied as standard
- -20°C to 180°C maximum temperature
- BSPP threaded to ISO 228-1
- 5000 PSI (1/8"-1/4") / 4000 PSI (3/8"-1/2") / 3000 PSI (3/4"-1")
- ISO 7421-1 Series B
- Double shut-off valve configuration

We also keep a large range of Cam fittings to suit all your requirements



We keep the accompanying ISO-B Nipple to be used with this Coupling

