


FEMALE HOSETAIL (CONE SEAT SWIVEL) 316L

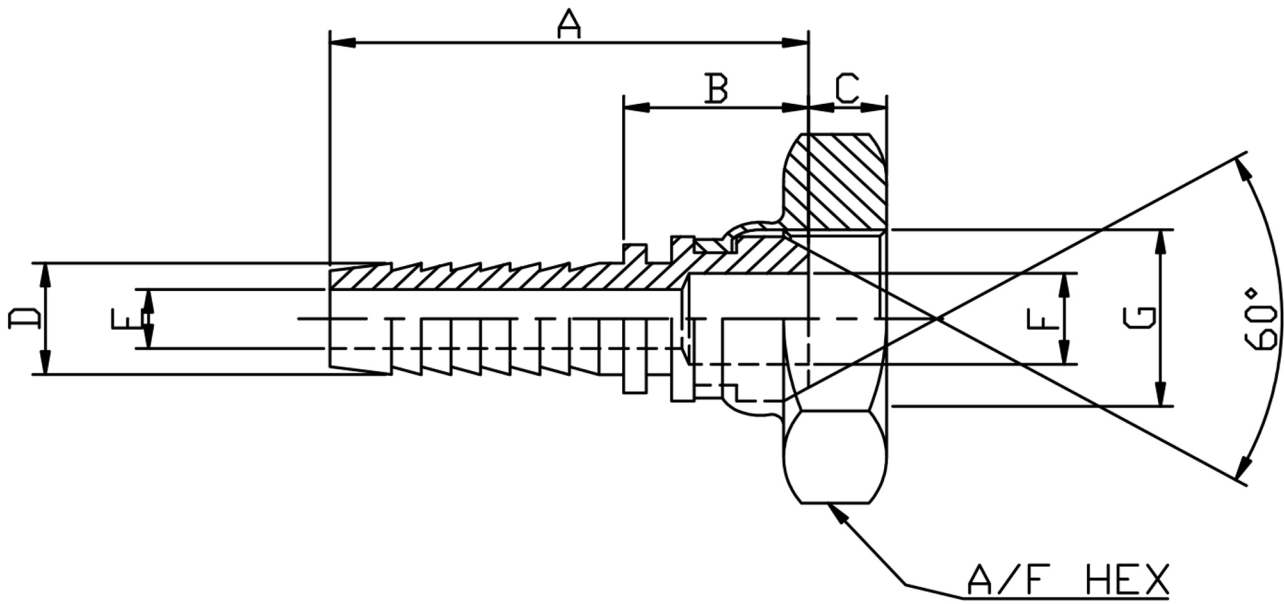

HOSE D	G BSPP	PART No	A	B	C	E	F	A/F	Kg/100
1/4	1/4	FHTC04	45.5	18.0	4.3	4.5	4.5	18.0	5
3/8	3/8	FHTC06	51.3	21.7	4.8	7.2	7.2	25.7	7
1/2	1/2	FHTC08	52.8	21.7	7.1	9.5	9.5	25.7	10
3/4	3/4	FHTC12	64.2	25.9	8.4	15.1	15.1	31.8	17
1	1	FHTC16	74.8	28.3	9.4	20.6	20.6	38.1	22
1-1/4	1-1/4	FHTC20	84.0	30.1	10.7	27.0	27.0	47.2	40
1-1/2	1-1/2	FHTC24	92.7	35.6	11.9	32.5	32.5	56.4	48
2	2	FHTC32	111.0	38.0	12.9	44.3	44.3	69.9	69

*Pressure rating up to 20 BAR (300 PSI)

*Female threads are BSPP (Parallel) to ISO 228-1

*316L stainless steel

*Sizes 1/8" to 2"

DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL