

SIZE	CODE	DIMENSIONS		
	BSP	I	K	KG EACH
1/8	UFMF02	29.1	43.5	0.089
1/4	UFMF04	29.1	45	0.109
3/8	UFMF06	34	50.5	0.152
1/2	UFMF08	37.5	53.5	0.164
3/4	UFMF12	44.5	61.5	0.23
1	UFMF16	53.5	70.4	0.401
1-1/4	UFMF20	64	75.8	0.544
1-1/2	UFMF24	71.5	82.4	0.724
2	UFMF32	85.5	91.2	1.055

NERO's range of 150lb fittings are available threaded BSP and NPT, or with Socket weld end connections. They are made from high quality investment castings to ISO4144 or above.

BSP threads are to ISO 228-1 and 7-1

NPT threads are to ANSI B2.1

Made from 316 (CF8M) stainless steel

TABLE 1: PRESSURE-TEMPERATURE RATING


TEMPERATURE (°C)	NO-SHOCK MAXIMUM WORKING PRESSURE (Bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

Note 1 Pressure for Intermediate temperatures may be determined by the interpolation method

Note 2 Temperatures indicated are those of the Internal fluid

Note 3 Piping loads, stresses And moments are not taken into account

Not the union you are looking for? see below for more options

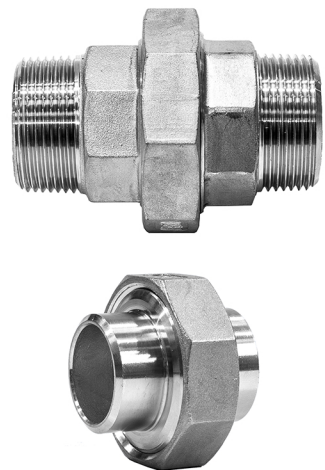

5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK