


Cam Coupler Female (Type D) BSPP 316

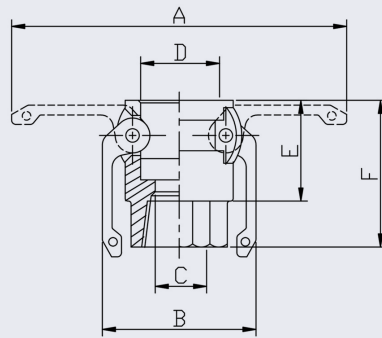

- Available in 316 stainless steel (CF8M)
- BUNA N (Nitrile) seals supplied as standard
- 100°C maximum temperature (when used with Nitrile seals)
- Made to standard A-A-59326 (MIL-C-27487) or DIN 2828
- Test Pressures 1/2" - 2" = 17.6 BAR (250 PSI)
- Test Pressures 2-1/2" = 15.8 BAR (225 PSI)
- Test Pressures 3" - 4" = 14.8 BAR (200 PSI)
- Test Pressures 5" - 6" = 10.5 BAR (150 PSI)

SIZE	BSPP	NPT	A	B	C	D	E	F	KG/100
1/2	CCD08	CCD08N	115	52	16	32.4	32	52	14.7
3/4	CCD12	CCD12N	115	52	19	32.4	32	52	26.4
1	CCD16	CCD16N	137	61	26	37.3	39	61	36.4
1-1/4	CCD20	CCD20N	183	81	33	46.0	48	68	63.4
1-1/2	CCD24	CCD24N	191	89	38	54.0	49	71	77.7
2	CCD32	CCD32N	201	99	50	63.7	54	78	98.2
2-1/2	CCD40	CCD40N	213	111	61	76.4	58	84	124.3
3	CCD48	CCD48N	267	137	75	92.2	60	90	182.5
4	CCD64	CCD64N	296	166	100	102.2	63	93	263.0
5	CCD80	CCD80N	322	192	125	146.0	65	101	395.0
6	CCD96	CCD96N	454	258	150	176.0	70	115	681.8

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep ISO B Quick Release Couplings and Nipples in this range



We also keep other types of Cam fittings to this standard



TUBES | PIPES | VALVES | FITTINGS | FLANGES