


# Reducing Coupling Socket Weld 3000LB (304/L)

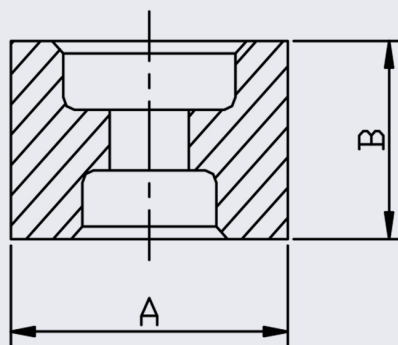

NERO's range of Reducing Couplings are available in NPT and Socket Weld configurations

Pressure rating up to 200 BAR (3000 PSI)

Full Material traceability is available and 3.1B certification can be provided upon request

Socket Weld ends are to ASME B16.11-2016 / BS3799

Larger sizes are available upon request

SIZE	PRODUCT CODE	DIMENSIONS		KG EACH
		A	B	
1/4 x 1/8	3RS0402SW-304	22	25	0.05
3/8 x 1/4	3RS0604SW-304	25	25	0.06
1/2 x 1/4	3RS0804SW-304	31	29	0.13
1/2 x 3/8	3RS0806SW-304	31	29	0.13
3/4 x 3/8	3RS1206SW-304	36	35	0.18
3/4 x 1/2	3RS1208SW-304	36	35	0.18
1 x 1/2	3RS1608SW-304	45	38	0.26
1 x 3/4	3RS1612SW-304	45	38	0.26
1-1/4 x 1	3RS2016SW-304	55	38	0.48
1-1/2 x 1	3RS2416SW-304	60	38	0.57
1-1/2 x 1-1/4	3RS2420SW-304	60	38	0.57
2 x 1	3RS3216SW-304	75	51	1.50
2 x 1-1/4	3RS3220SW-304	75	51	0.98
2 x 1-1/2	3RS3224SW-304	75	51	0.92

**\*\* Dimensions subject to change - Please contact us if critical \*\***

## Other products you might like...

Reducing Couplings in BSPP, NPT and Socket Weld can also be supplied as part of our low pressure 150lb range

