
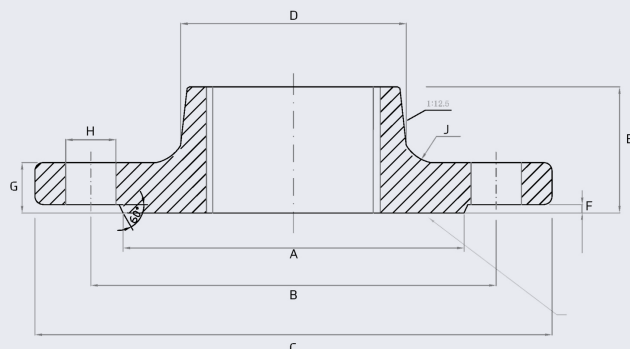


PN6 Threaded Flange (316/L)

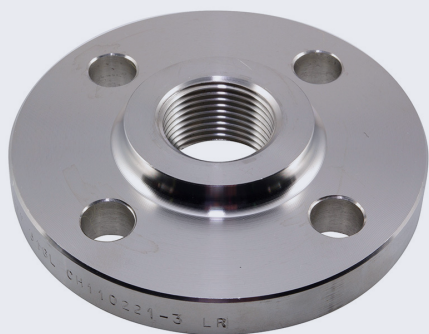

This flange conforms to EN 1092-1 and is available in 316/L.
The threads are BSPP to ISO 228/1.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket.
If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	CODE BSPP	A	B	C	D	E	F	G	H	J	BOLT	KG EACH	BOLT KIT
1/2	15	F640.5	40	55	80	30	20	2	12	11	4	4XM10	0.37	BK01
3/4	20	F640.75	50	65	90	40	24	2	14	11	4	4XM10	0.58	BK01
1	25	F641.0	60	75	100	50	24	2	14	11	4	4XM10	0.73	BK01
1 1/4	32	F641.25	70	90	120	60	26	2	14	14	6	4XM12	1.04	BK03
1 1/2	40	F641.5	80	100	130	70	26	3	14	14	6	4XM12	1.20	BK03
2	50	F642.0	90	110	140	80	28	3	14	14	6	4XM12	1.34	BK03
2 1/2	65	F642.5	110	130	160	100	32	3	14	14	6	4XM12	1.83	BK03
3	80	F643.0	128	150	190	110	34	3	16	18	8	4XM16	2.75	BK04
4	100	F644.0	148	170	210	140	40	3	16	18	8	4XM16	3.01	BK04

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Blind and Slip-On flanges to this standard



We also keep Gaskets to suit all our Flanges in both EPDM and Non-Asbestos materials

