
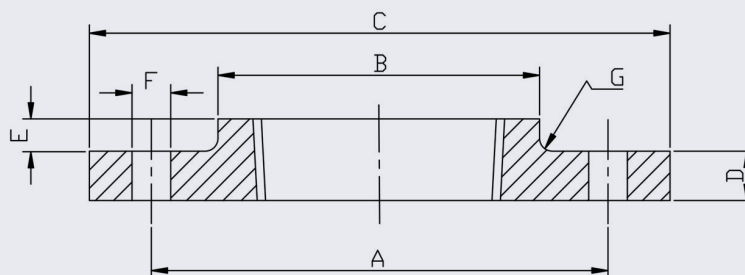


Table E Threaded Flange (316/L)

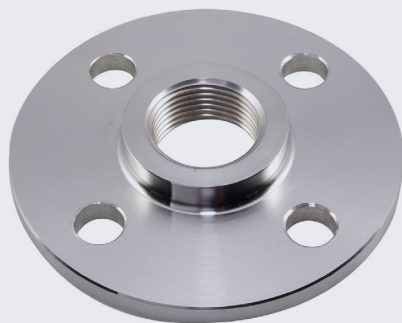

This flange conforms to ASTM A182 and is available in 316/L. Threads are BSPP to ISO 228-1

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	CODE	A	B	C	D	E	F	G	BOLT	KG EACH	BOLT KIT CODE
1/2	15	FESP0.5	66.68	33.34	95.25	6.35	14.29	14.29	1.6	4XM12	0.40	BK02
3/4	20	FESP0.75	73.03	38.1	101.6	6.35	14.29	14.29	1.6	4XM12	0.59	BK02
1	25	FESP1.0	82.55	47.63	114.3	7.14	14.29	14.29	1.6	4XM12	0.70	BK02
1.25	32	FESP1.25	87.31	55.56	120.65	7.94	14.29	14.29	1.6	4XM12	0.79	BK02
1.5	40	FESP1.5	98.43	61.91	133.35	8.73	14.29	14.29	1.6	4XM12	1.08	BK02
2	50	FESP2.0	114.3	74.61	152.4	9.53	17.46	17.46	1.6	4XM16	1.41	BK04
2.5	65	FESP2.5	127	90.49	165.1	10.32	17.46	17.46	1.6	4XM16	1.82	BK04
3	80	FESP3.0	146.05	106.36	184.15	11.11	17.46	17.46	1.6	4XM16	2.48	BK04
4	100	FESP4.0	177.8	133.35	215.9	12.7	17.46	17.46	3.2	8XM16	3.45	BK05

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Blind and Slip-On flanges to this standard



We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

