


PIPE SIZE	DN	CODE BSPP	CODE BSPT	CODE NPT	A	B	C	D	E	F	G	H	J	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F150SP0.5	F150SP0.5 BSPT	F150SP0.5 NPT	34.9	60.3	88.9	30.2	15.9	1.6	11.1	15.9	3	4XM12	0.4	BK02
3/4	20	F150SP0.75	F150SP0.75 BSPT	F150SP0.75 NPT	42.9	69.8	98.4	38.1	15.9	1.6	12.7	15.9	3	4XM12	0.7	BK03
1	25	F150SP1.0	F150SP1.0 BSPT	F150SP1.0 NPT	50.8	79.4	107.9	49.2	17.5	1.6	14.3	15.9	3	4XM12	0.9	BK03
1.25	32	F150SP1.25	F150SP1.25 BSPT	F150SP1.25 NPT	63.5	88.9	117.5	58.7	20.6	1.6	15.9	15.9	3	4XM12	1.2	BK03
1.5	40	F150SP1.5	F150SP1.5 BSPT	F150SP1.5 NPT	73	98.4	127	65.1	22.2	1.6	17.5	15.9	3	4XM12	1.5	BK03
2	50	F150SP2.0	F150SP2.0 BSPT	F150SP2.0 NPT	92.1	120.6	152.4	77.8	25.4	1.6	19	19	3	4XM16	2.3	BK04
2.5	65	F150SP2.5	F150SP2.5 BSPT	F150SP2.5 NPT	104.8	139.7	177.8	90.5	28.6	1.6	22.2	19	3	4XM16	3.7	BK06
3	80	F150SP3.0	F150SP3.0 BSPT	F150SP3.0 NPT	127	152.4	190.5	107.9	30.2	1.6	23.8	19	3	4XM16	4.2	BK06
4	100	F150SP4.0	F150SP4.0 BSPT	F150SP4.0 NPT	157.2	190.5	228.6	134.9	33.3	1.6	23.8	19	3	8XM16	5.9	BK07

This flange conforms to ANSI/ASME B16.5 and is available in 316/L. The threads are to ISO 7/1, 228/1 and ANSI B2.1.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

Need a gasket?
We keep those too

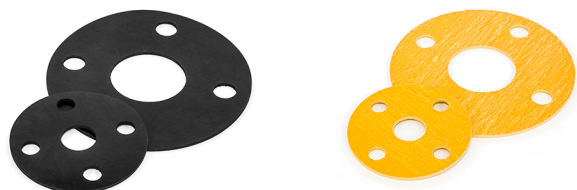

We also keep slip-on, blind and weld neck flanges to this standard

