


PN6 THREADED FLANGE (316/L)

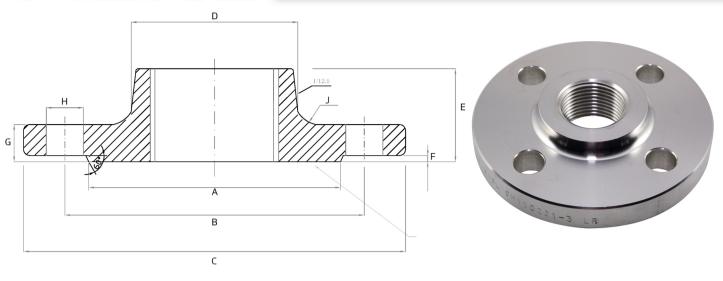

PIPE SIZE	DN	CODE BSPP	Α	В	С	D	E	F	G	Н	J	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F640.5	40	55	80	30	20	2	12	11	4	4XM10	0.37	BK01
3/4	20	F640.75	50	65	90	40	24	2	14	11	4	4XM10	0.58	BK01
1	25	F641.0	60	75	100	50	24	2	14	11	4	4XM10	0.73	BK01
1 1/4	32	F641.25	70	90	120	60	26	2	14	14	6	4XM12	1.04	ВК03
1 1/2	40	F641.5	80	100	130	70	26	3	14	14	6	4XM12	1.20	ВК03
2	50	F642.0	90	110	140	80	28	3	14	14	6	4XM12	1.34	BK03
2 1/2	65	F642.5	110	130	160	100	32	3	14	14	6	4XM12	1.83	ВК03
3	80	F643.0	128	150	190	110	34	3	16	18	8	4XM16	2.75	BK04
4	100	F644.0	148	170	210	40	40	3	16	18	8	4XM16	3.01	BK04

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

This flange conforms to EN 1092-1 and is available in 316/L. The threads are BSPP to ISO 228/1.

Full material traceablity is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials





