


S.NO.	COMPONENT	MATERIAL
1	HANDLE SLEEVE	PVC
2	HANDLE	304
3	GLAND NUT	304/316
4	STEM NUT	304
5	SPRING WASHER	304
6	STEM PACKING	PTFE
7	THRUST WASHER	PTFE
8	JOINT GASKET	PTFE
9	CAP	CF8/CF8M
10	BODY	CF8/CF8M
11	BALL SEAT	RPTFE
12	BALL	CF8/CF8M
13	STEM	304/316

- Pressure rated at 2000 PSI (WOG) - 1/4" -> 2"
- Sizes available from 1/4" up to 2"
- 2-Piece Full Bore / Port
- Threaded Ends: BSPP (ISO 228-1)
- Investment casting Body & Cap
- Internal entry blow-out proof stem
- Inspection Testing: API 598, / EN12266
- 1/4 turn lockable handle
- ASME B16.34 Wall Thickness NACE MR0175

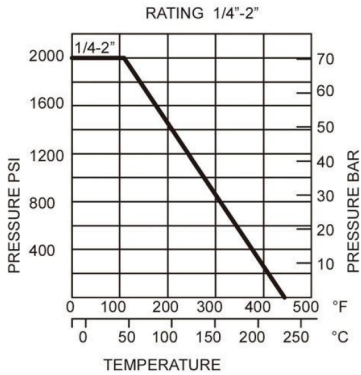

SIZE	PRODUCT CODE BSPP	D	L	H	W	K	S	CV	KG EACH
1/4	2FBV04	9.2	55	48	91	28.5	25	6.6	0.35
3/8	2FBV06	9.2	60	48	91	28.5	25	7.9	0.35
1/2	2FBV08	12.7	75	52	103	28.5	30	11.2	0.50
3/4	2FBV12	20	80	61	111	34.8	36	21	0.82
1	2FBV16	25	90	65	126	34.8	44.6	35	1.25
1 1/4	2FBV20	32	110	79	154	34.8	54	57	1.93
1 1/2	2FBV24	38	120	83	154	38.1	61	80	3.00
2	2FBV32	50	140	97	191	38.1	75	148	4.50

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK