


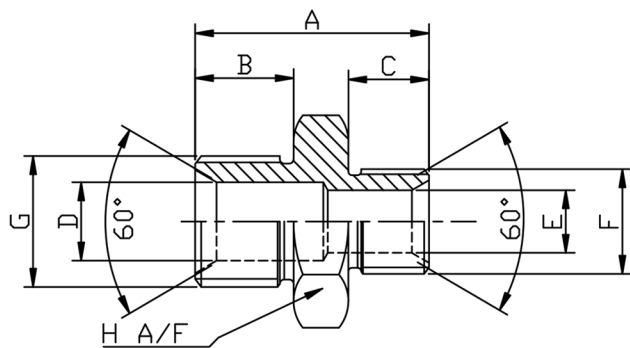

SIZE BSPP (G)	SIZE BSPP (F)	PRODUCT CODE	PRESSURE (BAR)	A	B	C	D	E	H A/F	KG EACH
1/4	1/8	RN0402P	350	26.1	11.1	8.1	4.7	3.5	19.1	0.028
3/8	1/8	RN0602P	350	28.1	12.1	8.1	7.9	3.5	22.2	0.040
3/8	1/4	RN0604P	350	31.1	12.1	11.1	7.9	4.7	22.2	0.041
1/2	1/4	RN0804P	315	35.1	14.1	11.1	11.1	4.7	28.6	0.080
1/2	3/8	RN0806P	315	36.1	14.1	12.1	11.1	7.9	28.6	0.083
3/4	3/8	RN1206P	250	40.1	16.1	12.1	16.6	7.9	31.7	0.12
3/4	1/2	RN1208P	250	42.1	16.1	14.1	16.6	11.1	31.7	0.12
1	1/4	RN1604P	200	42.1	16.1	14.1	22.2	4.7	41.3	0.18
1	3/8	RN1606P	200	43.1	19.1	12.1	22.2	7.9	41.3	0.19
1	1/2	RN1608P	200	45.1	19.1	14.1	22.2	11.1	41.3	0.20
1	3/4	RN1612P	200	47.1	19.1	16.1	22.2	16.6	41.3	0.19
1-1/4	3/4	RN2012P	160	50.1	20.1	16.1	28.6	16.6	50.8	0.33
1-1/4	1	RN2016P	160	53.1	20.1	19.1	28.6	22.2	50.8	0.34
1-1/2	3/4	RN2412P	125	52.1	22.1	16.1	33.3	26.6	56.4	0.41
1-1/2	1	RN2416P	125	55.1	22.1	19.1	33.3	22.2	56.4	0.42
1-1/2	1-1/4	RN2420P	125	56.1	22.1	20.1	33.3	28.6	56.4	0.44
2	1	RN3216P	80	62.1	25.1	19.1	46.1	22.2	69.8	0.69
2	1-1/4	RN3220P	80	63.1	25.1	20.1	46.1	28.6	69.8	0.70
2	1-1/2	RN3224P	80	65.1	25.1	20.1	46.1	33.3	69.8	0.70

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****

NERO's range of Hexagonal Reducing Nipples are available in BSPP thread form with a 60° internal cone on the male ends & recessed to accept a Bonded Washer

Pressure rating up to 350 BAR (size dependant)

Can be supplied with 2.2 Certificate of Conformity - upon request

BSPP Male threads are to ISO 228/1
60° internal cone to BS 5200

We stock a wide range of Hydraulic Fittings to suit your requirements



We also keep Equal versions of this fitting + Bonded Washers in our Hydraulic range

