


| SIZE IMPERIAL / METRIC | PRODUCT CODE | L | H (OPEN) | F | G | ORIFICE | CV | KG EACH |
|------------------------|--------------|------|----------|-----|----|---------|------|---------|
| 1/4 | 6RBV04COMP | 91.6 | 44 | 130 | 32 | 10 | 1.20 | 0.38 |
| 3/8 | 6RBV06COMP | 94.6 | 44 | 130 | 32 | 10 | 3.70 | 0.45 |
| 1/2 | 6RBV08COMP | 99.6 | 44 | 130 | 32 | 10 | 7.50 | 0.50 |
| 6MM | 6RBV6MMCOMP | 99 | 44 | 130 | 32 | 10 | 1.20 | 0.66 |
| 8MM | 6RBV8MMCOMP | 91.6 | 44 | 130 | 32 | 10 | 1.20 | 0.72 |
| 10MM | 6RBV10MMCOMP | 94 | 44 | 130 | 32 | 10 | 3.70 | 0.80 |
| 12MM | 6RBV12MMCOMP | 100 | 44 | 130 | 32 | 10 | 7.50 | 0.93 |

| S.NO. | COMPONENT | MATERIAL |
|-------|----------------|-----------------|
| 1 | BODY | 316 SS / A479 |
| 2 | BALL | 316 SS / A479 |
| 3 | END CONNECTORS | 316 SS / A479 |
| 4 | SEAT | PEEK |
| 5 | STEM PACKING | PTFE / D1710 |
| 6 | STEM | 316 SS / A240 |
| 7 | STOP PIN | STAINLESS STEEL |
| 8 | STOP BLOCK | 316 SS / A240 |
| 9 | HANDLE | STAINLESS STEEL |
| 10 | NUT | STAINLESS STEEL |



- Pressure up to 10,000 PSI (689 BAR) for standard series
- Temperature from -46C to 232C with PTFE packing
- Free floating ball design provides seat wear compensation
- Bi-directional flow for 2-way valves
- Blow out resistant stem with self-sealing function
- 100% factory tested

Pressure vs. Temperature

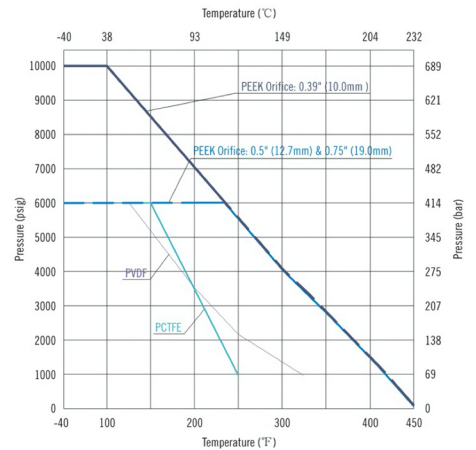

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLA AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK