


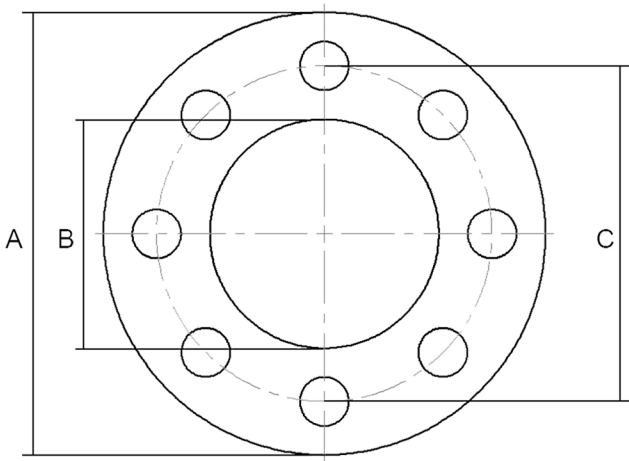

PIPE SIZE (N.B)	DN	CODE	C	A	B
1/2	15	GE0.56FF3	55	80	22
3/4	20	GE0.756FF3	65	90	27.5
1	25	GE1.06FF3	75	100	34.5
1.25	32	GE1.256FF3	90	120	43.5
1.5	40	GE1.56FF3	100	130	49.5
2	50	GE2.06FF3	110	140	61.5
2.5	65	GE2.56FF3	130	160	74.7
3	80	GE3.06FF3	150	190	90.5
4	100	GE4.06FF3	170	210	116
5	125	GE5.06FF3	200	240	143.8
6	150	GE6.06FF3	225	265	170.5

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

Material Data Sheet

Material Reference

2349

Colour

BLACK

To Specification

COMMERCIAL

Basic Properties	Value	Test Method	Unit
Base Polymer Type	SBR/EPDM		
Indentation Hardness	60 Shore A -4 +5	ASTM D2240 00	Degrees
Specific Gravity	1.5 +/- 0.05	ASTM D792	g/cm3
Tensile Strength - Minimum	3	ASTM D412	Mpa
Elongation @ Break - Minimum	250	ASTM D412	%
Minimum Continuous Working Temperature	-20		°C
Maximum Continuous Working Temperature	70		°C
Maximum Intermittent Working Temperature	90		°C
Compression Set 70 Degrees 22 Hours	30% Max	ASTM D395 Method B	%
Insertion Type	None		

Guidelines for Use (It is the Customers responsibility to ensure suitability of Use)

Food Use Suitability	Not Recommended
Abrasion Resistance	Moderate
Ozone Weather Resistance	Moderate
Flame Retardancy	Not Recommended
Electrical Resistance	Not Recommended
General Purpose	Not Recommended



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: [INFO@NERO.CO.UK](mailto:info@nero.co.uk)

UNIT 2, UNION RD, ANGLO AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK