


S.NO.	COMPONENT	MATERIAL
1	HANDLE SLEEVE	PVC
2	HANDLE	304
3	GLAND NUT	304
4	STEM NUT	304
5	SPRING WASHER	304
6	STEM PACKING	PTFE
7	THRUST WASHER	PTFE
8	JOINT GASKET	PTFE
9	CAP	CF8/CF8M
10	BODY	CF8/CF8M
11	BALL SEAT	RPTFE
12	BALL	CF8/CF8M
13	STEM	304/316

- Pressure rated at 1000 PSI (WOG) - 1/4" -> 2"
- Sizes available from 1/4" up to 2"
- 2-Piece Full Port
- Threaded Ends: BSPT (ISO 7.1) BSPP (ISO 228-1)
- Investment casting
- Blow-out proof stem
- Inspection Testing: API 598 / EN12266
- 1/4 turn handle / Lockable
- PED97/23/EC (CE0035) Approved

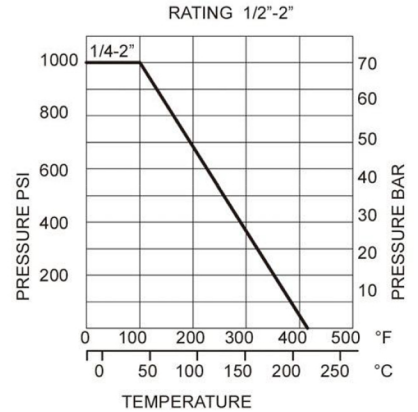

SIZE	PRODUCT CODE BSPT / BSPP	ØD	Ød	L	H	W	S	CV	KG EACH
1/4	MFFBV04	11.6	8	55	48	91	19	6	0.30
3/8	MFFBV06	12.5	11.4	55	48	91	21	7	0.31
1/2	MFFBV08	15	13.6	71.5	52	91	25.5	10	0.35
3/4	MFFBV12	20	18.2	78	61	111	31	25	0.58
1	MFFBV16	25	23	91	65	111	37.5	35	1.04
1 1/4	MFFBV20	32	32	100	79	154	46.5	46	1.54
1 1/2	MFFBV24	38	38	112	83	154	53.5	80	2.26
2	MFFBV32	50	48	142	97	192	66	110	3.80

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****

