
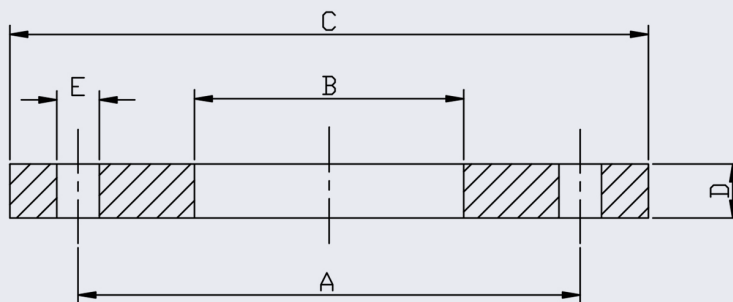


Table D Slip-on Flange (316/L & 304/L)

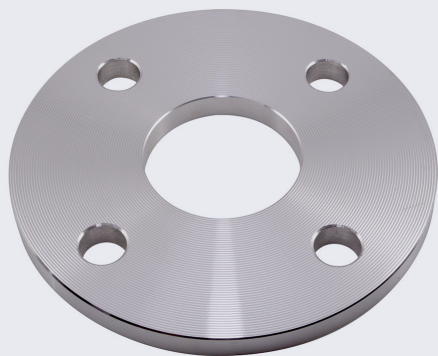

This flange conforms to ASTM A182 and is available in 316/L and 304/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	CODE 316	CODE 304	A	B	C	D	E	BOLT	BOLT KIT CODE	KG EACH
1/2	15	FES0.5	FES0.5-304	66.70	22.00	95.25	4.76	14.29	4XM12	BK02	0.33
3/4	20	FES0.75	FES0.75-304	73.00	28.00	101.60	4.76	14.29	4XM12	BK02	0.37
1	25	FES1.0	FES1.0-304	82.60	35.00	114.30	4.76	14.29	4XM12	BK02	0.55
1.25	32	FES1.25	FES1.25-304	87.30	43.00	120.60	6.35	14.29	4XM12	BK02	0.70
1.5	40	FES1.5	FES1.5-304	98.40	49.00	133.40	6.35	14.29	4XM12	BK02	0.81
2	50	FES2.0	FES2.0-304	114.30	62.00	152.40	7.94	17.46	4XM16	BK04	1.11
2.5	65	FES2.5	FES2.5-304	127.00	74.70	165.10	7.94	17.46	4XM16	BK04	1.40
3	80	FES3.0	FES3.0-304	146.00	91.00	184.20	9.53	17.46	4XM16	BK04	1.72
4	100	FES4.0	FES4.0-304	177.80	116.00	215.90	9.53	17.46	4XM16	BK04	2.60
5	125	FES5.0	FES5.0-304	209.60	143.00	254.00	12.70	17.46	8XM16	BK05	3.80
6	150	FES6.0	FES6.0-304	235.00	171.00	279.40	12.70	22.23	8XM16	BK05	5.30
8	200	FES8.0	FES8.0-304	292.10	221.00	336.60	12.70	22.23	8XM16	BK05	5.70
10	250	FES10.0	FES10.0-304	355.60	276.00	406.40	15.90	22.23	8XM20	BK11	10.40
12	300	FES12.0	FES12.0-304	406.40	327.00	457.20	19.00	25.40	12XM20	BK11	16.00

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Slip-On and Threaded flanges to this standard



We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

