


PIPE SIZE	DN	CODE 316	CODE 304	A	B	C	D	E	F	G	H	J	K	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F150S0.5	F150S0.5-304	34.9	60.3	22.3	30.2	88.9	15.9	11.1	1.6	3	15.9	4XM12	0.4	BK02
3/4	20	F150S0.75	F150S0.75-304	42.9	69.8	27.7	38.1	98.4	15.9	12.7	1.6	3	15.9	4XM12	0.7	BK03
1	25	F150S1.0	F150S1.0-304	50.8	79.4	34.5	49.2	107.9	17.5	14.3	1.6	3	15.9	4XM12	0.8	BK03
1.25	32	F150S1.25	F150S1.25-304	63.5	88.9	43.2	58.7	117.5	20.6	15.9	1.6	3	15.9	4XM12	1.1	BK03
1.5	40	F150S1.5	F150S1.5-304	73	98.4	49.5	65.1	127	22.2	17.5	1.6	3	15.9	4XM12	1.4	BK03
2	50	F150S2.0	F150S2.0-304	92.1	120.6	62	77.8	152.4	25.4	19	1.6	3	19.0	4XM16	2.2	BK04
2.5	65	F150S2.5	F150S2.5-304	104.8	139.7	74.7	90.5	177.8	28.6	22.2	1.6	3	19.0	4XM16	3.6	BK06
3	80	F150S3.0	F150S3.0-304	127	152.4	90.7	107.9	190.5	30.2	23.8	1.6	3	19.0	4XM16	4.1	BK06
4	100	F150S4.0	F150S4.0-304	157.2	190.5	116.1	134.9	228.6	33.3	23.8	1.6	3	19.0	8XM16	5.6	BK07
5	125	F150S5.0	F150S5.0-304	185.7	215.9	143.8	163.5	254	36.5	23.8	1.6	6.5	22.2	8XM20	6.3	BK10
6	150	F150S6.0	F150S6.0-304	215.9	241.3	170.7	192.1	279.4	39.7	25.4	1.6	6.5	22.2	8XM20	7.5	BK10
8	200	F150S8.0	F150S8.0-304	269.9	298.4	221.5	246	343	44.5	28.6	1.6	6.5	22.2	8XM20	12.6	BK12
10	250	F150S10.0	F150S10.0-304	323.8	362	276.4	305	406	49.2	31.8	1.6	6.5	25.4	12XM22	18.5	BK13
12	300	-	F150S12.0-304	381.0	431.8	327.2	365.3	482.6	55.6	31.8	1.6	6.5	25.4	12XM22	26.6	BK13

This flange conforms to ANSI/ASME B16.5 and is available in 316/L or 304/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

Need a gasket?
We keep those too

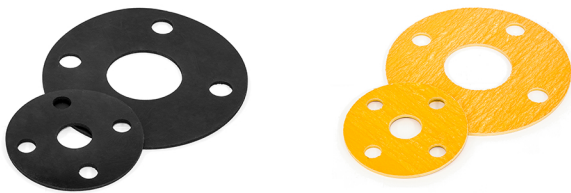

We also keep screwed, blind and weld neck flanges to this standard

