


H-Thrd's
Minimum 4 Full Thrd's
Engagement Class 2A/2B Fit
ANSI B1.1

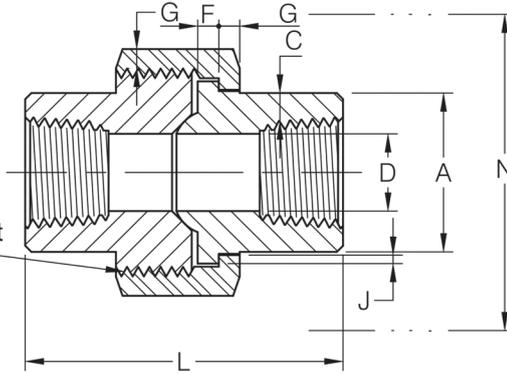

SIZE	PRODUCT CODE BSPT	PRODUCT CODE NPT	DIMENSIONS									
			PIPE END A (MIN)	WALL C (MIN)	WATER WAY BORE D*	MALE FLANGE F (MIN)	NUT G (MIN)	THREADS PER 25.4MM H	BEARING J (MIN)	LENGTH ASSEM. NOM. L	CLEAR ASSEM. NOM. N	KG EACH
1/4	3UC04T	3UC04N	19.0	3.02	11.13 / 9.45	3.18	3.18	16	1.24	41.4	50.8	0.25
3/8	3UC06T	3UC06N	22.9	3.20	14.27 / 13.51	3.43	3.43	14	1.37	46.0	55.9	0.26
1/2	3UC08T	3UC08N	27.7	3.73	17.86 / 17.07	3.68	3.68	14	1.50	49.0	58.4	0.34
3/4	3UC12T	3UC12N	33.5	3.91	23.01 / 21.39	4.06	4.06	11	1.68	56.9	66.0	0.48
1	3UC16T	3UC16N	41.4	4.55	28.98 / 27.74	4.57	4.45	11	1.85	62.0	78.7	0.77
1-1/4	3UC20T	3UC20N	50.5	4.85	37.69 / 35.36	5.33	5.21	10	2.13	71.1	94.0	1.14
1-1/2	3UC24T	3UC24N	57.2	5.08	43.54 / 41.20	5.84	5.59	10	2.31	76.5	111.8	1.39
2	3UC32T	3UC32N	70.1	5.54	55.58 / 52.12	6.60	6.35	10	2.69	86.1	132.1	2.43

* Upper and Lower values for each size are the respective maximum and minimum dimensions

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****

NERO's range of Cone Seat Unions are available in BSPT, NPT and Socket Weld configurations - ASME B16.11-2016

Pressure rating up to 200 BAR (3000 PSI)

Full Material traceability is available and 3.1B certification can be provided upon request

BSPT threads are to ISO 7.1
NPT threads are to ANSI B2.1

Larger sizes are available upon request

Cone Seat Unions can also be supplied as part of our low pressure 150lb range in Female, Male/Female, Male/Male and Butt Weld ends



We also keep Cone Seat Unions with Socket Weld ends in 3000lb 316/L



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK