


# Cam Coupler Male (Type B) BSPT 316

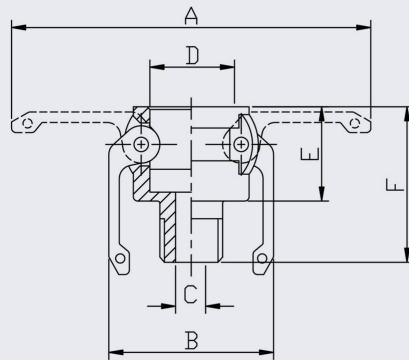

- Available in 316 stainless steel (CF8M)
- BUNA N (Nitrile) seals supplied as standard
- 100°C maximum temperature (when used with Nitrile seals)
- Made to standard A-A-59326 (MIL-C-27487) or DIN 2828
- Test Pressures 1/2" - 2" = 17.6 BAR (250 PSI)
- Test Pressures 2-1/2" = 15.8 BAR (225 PSI)
- Test Pressures 3" - 4" = 14.8 BAR (200 PSI)
- Test Pressures 5" - 6" = 10.5 BAR (150 PSI)

| SIZE  | BSPP  | NPT    | A   | B   | C   | D     | E  | F   | KG/100 |
|-------|-------|--------|-----|-----|-----|-------|----|-----|--------|
| 1/2   | CCB08 | CCB08N | 115 | 52  | 17  | 32.4  | 32 | 52  | 13.3   |
| 3/4   | CCB12 | CCB12N | 115 | 52  | 19  | 32.4  | 32 | 52  | 23.4   |
| 1     | CCB16 | CCB16N | 137 | 61  | 24  | 37.3  | 39 | 62  | 34.5   |
| 1-1/4 | CCB20 | CCB20N | 183 | 81  | 28  | 46.0  | 48 | 72  | 59.3   |
| 1-1/2 | CCB24 | CCB24N | 191 | 89  | 35  | 54.0  | 49 | 73  | 71.4   |
| 2     | CCB32 | CCB32N | 201 | 99  | 48  | 63.7  | 54 | 81  | 93.0   |
| 2-1/2 | CCB40 | CCB40N | 213 | 111 | 58  | 76.4  | 58 | 89  | 134.9  |
| 3     | CCB48 | CCB48N | 267 | 137 | 72  | 92.2  | 60 | 93  | 177.0  |
| 4     | CCB64 | CCB64N | 296 | 166 | 96  | 102.2 | 63 | 99  | 233.5  |
| 5     | CCB80 | CCB80N | 322 | 192 | 117 | 146.0 | 65 | 103 | 363.0  |
| 6     | CCB96 | CCB96N | 454 | 258 | 142 | 176.0 | 70 | 113 | 536.9  |

**\*\* Dimensions subject to change - Please contact us if critical \*\***

## Other products you might like...

We also keep ISO B Quick Release Couplings and Nipples in this range



To go with these seals, we keep a wide range of Cam fittings to suit your needs

