


H-Thrd's Minimum 4 Full Thrd's Engagement Class 2A/2B Fit

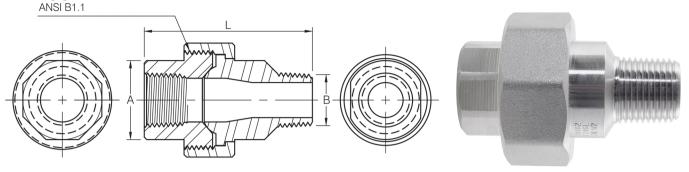

SIZE	PRODUCT CODE	PRODUCT CODE	DIMENSIONS			KG EACH
	BSPT	NPT	A (MIN)	В	L	NG EACH
1/4	3UCMF04T	3UCMF04N	19.0	13.7	61.0	0.16
3/8	3UCMF06T	3UCMF06N	22.9	17.1	60.0	0.22
1/2	3UCMF08T	3UCMF08N	27.7	21.3	68.0	0.38
3/4	3UCMF12T	3UCMF12N	33.5	26.7	80.0	0.45
1	3UCMF16T	3UCMF16N	41.4	33.4	86.0	0.70
1-1/4	3UCMF20T	3UCMF20N	50.5	42.2	98.0	1.00
1-1/2	3UCMF24T	3UCMF24N	57.2	48.3	100.5	1.35
2	3UCMF32T	3UCMF32N	70.1	60.3	112.1	2.20

^{**} DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

NERO's range of Male/Female Cone Seat Unions are available in BSPT and NPT thread type - ASME B16.11-2016

Pressure rating up to 200 BAR (3000 PSI)

Full Material traceability is available and 3.1B certification can be provided upon request

BSPT threads are to ISO 7.1 NPT threads are to ANSI B2.1

Larger sizes are available upon request

Cone Seat Unions can also be supplied as part of our low pressure 150lb range in Female, Male/Female, Male/Male and Butt Weld ends









We also keep Cone Seat Unions with Socket Weld ends in 3000lb 316/L







SAME DAY DISPATCH -ORDERS PLACED BEFORE 4:30PM



