
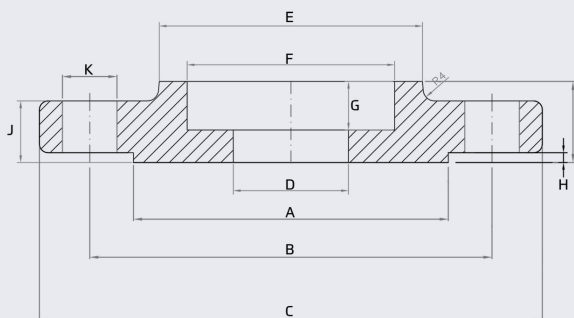


ANSI 150LB Socket Weld Flange 316/L (SCH.40)

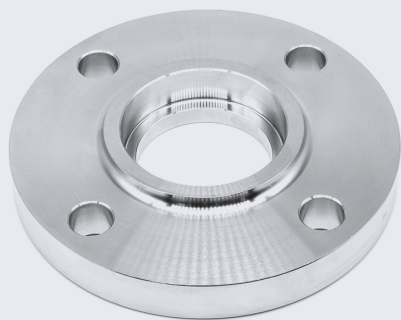

This flange conforms to ANSI/ASME B16.5 and is available in Schedule 40 - 316/L

Full material traceability is available and 3.1B certification can be provided upon request

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	CODE 316	A	B	C	D	E	F	G	H	I	J	K	BOLT	KG EACH	BOLT KIT
1/2	15	F150SP0.5	35.1	60.5	88.9	15.8	30.2	22.4	9.7	1.6	15.7	11.2	15.7	4XM12	0.40	BK02
3/4	20	F150SP0.75	42.9	69.9	98.6	21.0	38.1	27.7	11.2	1.6	15.7	12.7	15.7	4XM12	0.70	BK03
1	25	F150SP1.0	50.8	79.2	108.0	26.6	49.3	34.5	12.7	1.6	17.5	14.2	15.7	4XM12	0.80	BK03
1.25	32	F150SP1.25	63.5	88.9	117.3	35.1	58.7	43.2	14.2	1.6	20.6	15.7	15.7	4XM12	1.10	BK03
1.5	40	F150SP1.5	73.2	98.6	127.0	40.9	65.0	49.5	15.7	1.6	22.4	17.5	15.7	4XM12	1.40	BK03
2	50	F150SP2.0	91.9	120.7	152.4	52.5	77.7	62.0	17.5	1.6	25.4	19.1	19.1	4XM16	2.20	BK04
2.5	65	F150SP2.5	104.6	139.7	177.8	62.7	90.4	74.7	19.1	1.6	28.4	22.4	19.1	4XM16	3.60	BK06
3	80	F150SP3.0	127.0	152.4	190.5	77.9	108.0	90.7	20.6	1.6	30.2	23.9	19.1	4XM16	4.10	BK06


**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Screwed, Blind, Weld Neck and Slip-On flanges to this standard



We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

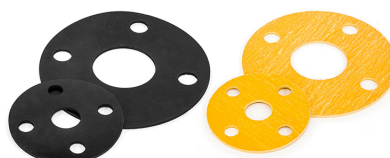

TUBES | PIPES | VALVES | FITTINGS | FLANGES