

PIPE SIZE	DN	CODE 316	CODE 304	A	B	C	D	E	F	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F1680.5	F1680.5-304	45	65	95	16	2	14	4XM12	0.72	BK03
3/4	20	F1680.75	F1680.75-304	58	75	105	18	2	14	4XM12	1.01	BK03
1	25	F1681.0	F1681.0-304	68	85	115	18	2	14	4XM12	1.23	BK03
1.25	32	F1681.25	F1681.25-304	78	100	150	18	2	18	4XM16	1.80	BK04
1.5	40	F1681.5	F1681.5-304	88	110	150	18	3	18	4XM16	2.09	BK04
2	50	F4082.0	-	102	125	165	20	3	18	4XM16	3.40	BK04
2 1/2	65	F4082.5	-	122	145	185	22	3	18	8XM16	4.50	BK07
3	80	F4083.0	-	138	160	200	24	3	18	8XM16	6.20	BK07
4	100	F4084.0	-	162	190	235	24	3	22	8XM20	8.70	BK10
5	125	F4085.0	-	188	220	270	26	3	26	8XM24	12.40	BK14
6	150	F4086.0	-	218	250	300	28	3	26	8XM24	19.50	BK14
8	200	F2588.0	F2588.0-304	278	310	360	30	3	26	12XM24	21.90	BK14
8	200	F4088.0	-	285	320	375	36	3	30	12XM27	30.50	BK16

* FOR 1-1/2" AND BELOW, PN25/40 ARE THE SAME DIMENSIONS AS PN16 AS SHOWN IN THE TABLE ABOVE *


** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

This flange conforms to EN 1092-1 and is available in both 316/L and 304/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

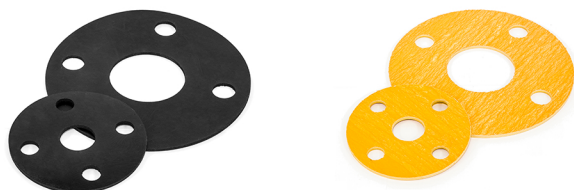

We also keep Slip-On and Threaded flanges to this standard

