


SIZE	CODE	DIMENSIONS		
	BSP	A	B	Kg/100
1/8	UCMF02	29.1	35.5	0.09
1/4	UCMF04	29.1	46	0.11
3/8	UCMF06	34	47.5	0.15
1/2	UCMF08	37.5	53.6	0.16
3/4	UCMF12	44.5	58.3	0.23
1	UCMF16	53.5	69	0.40
1-1/4	UCMF20	64	71.1	0.54
1-1/2	UCMF24	71.5	80	0.72
2	UCMF32	85.5	88.2	1.05

Not the union you are looking for? see below for more options

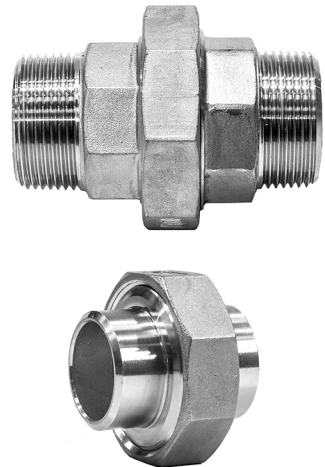

NERO's range of 150lb fittings are available threaded BSP and NPT, or with Socket weld end connections. They are made from high quality investment castings to ISO4144 or above.

BSP threads are to ISO 228-1 and 7-1

NPT threads are to ANSI B2.1

Made from 316 (CF8M) stainless steel

TABLE 1: PRESSURE-TEMPERATURE RATING

TEMPERATURE (°C)	NO-SHOCK MAXIMUM WORKING PRESSURE (Bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

Note 1 Pressure for Intermediate temperatures may be determined by the interpolation method

Note 2 Temperatures indicated are those of the Internal fluid

Note 3 Piping loads, stresses And moments are not taken into account



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK