

TO WORK OUT THE INSIDE DIAMETER OF PIPE

- Multiply the Wall Thickness by 2
- Then deduct this number off the OD of the Pipe

SIZE (OD) INCHES	CODE	A (OD) MM	SWG (GAUGE)	B INCHES	B MM	MAXIMUM WORKING PRESSURE (BAR)	KG / MTR
1/8	0.12520316S	3.18	20	0.036	0.914	718	0.052
3/16	0.187518316S	4.76	18	0.048	1.218	669	0.109
3/16	0.187520316S	4.76	20	0.036	0.914	480	0.088
1/4	0.2516316S	6.35	16	0.064	1.625	667	0.192
1/4	0.2518316S	6.35	18	0.048	1.218	501	0.157
1/4	0.2520316S	6.35	20	0.036	0.914	360	0.124
3/8	0.37516316S	9.53	16	0.064	1.625	444	0.321
3/8	0.37518316S	9.53	18	0.048	1.218	334	0.253
3/8	0.37520316S	9.53	20	0.036	0.914	240	0.197
1/2	0.514316S	12.7	14	0.080	2.03	426	0.560
1/2	0.516316S	12.7	16	0.064	1.625	333	0.451
1/2	0.518316S	12.7	18	0.048	1.218	251	0.350
1/2	0.520316S	12.7	20	0.036	0.914	180	0.270
5/8	0.62518316S	15.88	18	0.048	1.218	200	0.447
5/8	0.62530316S	15.88	20	0.036	0.914	144	0.342
3/4	0.7514316S	19.05	14	0.080	2.03	284	0.895
3/4	0.7516316S	19.05	16	0.064	1.625	222	0.709
3/4	0.7518316S	19.05	18	0.048	1.218	167	0.544
3/4	0.7520316S	19.05	20	0.036	0.914	120	0.415
1	1.014316S	25.4	14	0.080	2.03	213	1.231
1	1.016316S	25.4	16	0.064	1.625	167	0.967
1	1.018316S	25.4	18	0.048	1.218	125	0.738
1	1.020316S	25.4	20	0.036	0.914	90	0.546

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****


NERO's range of seamless tube is to ASTM A269/A213 and is available in 316/L material from 14 to 20 gauge.

We keep all sizes in full lengths (6 metres) and sell by the metre, this enables us to supply lengths as short as 1 metre long.

We can also offer an accurate cutting service on any of our tube to a tolerance of +/- 1mm.



Did you know we also keep Compression fittings to suit this tube?

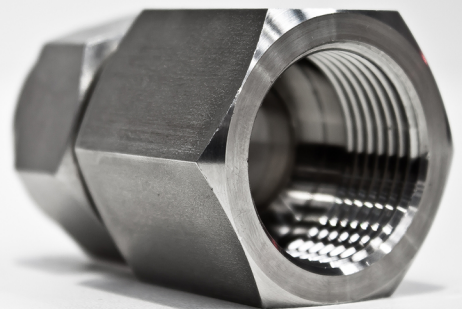

5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK