


PIPE SIZE	DN	CODE	A	B	C	D	E	F	G	H	J	K	BOLT	Kg	BOLT KIT CODE
1/2	15	F300SP0.5 BSPT	34.9	60.3	88.9	30.2	22.2	2	14.3	4X15.9	3	15.9	4XM12	0.7	BK03
3/4	20	F300SP0.75 BSPT	42.9	69.8	98.4	38.1	25.4	2	15.9	4X19.0	3	19.05	4XM16	1.2	BK06
1	25	F300SP1.0 BSPT	50.8	79.4	107.9	49.2	27	2	17.5	4X19.0	3	19.05	4XM16	1.5	BK06
1.25	32	F300SP1.25 BSPT	63.5	88.9	117.5	58.7	27	2	19	4X19.0	3	19.05	4XM16	2	BK06
1.5	40	F300SP1.5 BSPT	73	98.4	127	65.1	30.2	2	20.6	4X22.2	3	22.23	4XM20	2.9	BK17
2	50	F300SP2.0 BSPT	92.1	120.6	152.4	77.8	33.3	2	22.2	8X19.0	3	19.05	8XM16	3.4	BK07
2.5	65	F300SP2.5 BSPT	104.8	139.7	177.8	90.5	38.1	2	25.4	8X22.2	3	22.23	8XM20	5.1	BK12
3	80	F300SP3.0 BSPT	127	152.4	190.5	107.9	42.9	2	28.6	8X22.2	3	22.23	8XM20	7	BK12
4	100	F300SP4.0 BSPT	157.2	190.5	228.6	134.9	47.6	2	31.8	8X22.2	3	22.23	8XM20	11.8	BK12

This flange conforms to ANSI/ASME B16.5 and is available in 316/L. Thread is to ISO 7-1

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

Need a gasket?
We keep those too

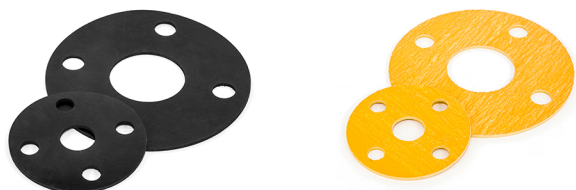

We also keep slip-on and blind flanges to this standard

