


ANSI 300LB Slip On Flange (316/L)

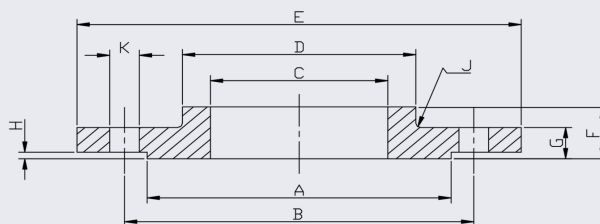

This flange conforms to ANSI/ASME B16.5 and is available in 316/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	CODE	A	B	C	D	E	F	G	H	J	K	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F300S0.5	34.9	66.7	22.3	38	95	21	15.9	2	3	15.9	4XM12	0.70	BK03
3/4	20	F300S0.75	42.9	82.6	27.7	48	115	24	15.9	2	3	19.05	4XM16	1.10	BK06
1	25	F300S1.0	50.8	88.9	34.5	54	125	25	17.5	2	3	19.05	4XM16	1.40	BK06
1.25	32	F300S1.25	63.5	98.4	43.2	64	135	25	20.6	2	3	19.05	4XM16	1.80	BK06
1.5	40	F300S1.5	73	114.3	49.5	70	155	29	22.2	2	3	22.23	4XM20	2.60	BK17
2	50	F300S2.0	92.1	127	62	84	165	32	25.4	2	3	19.05	8XM16	3.40	BK07
2.5	65	F300S2.5	104.8	149.2	74.7	100	190	37	28.6	2	3	22.23	8XM20	4.40	BK12
3	80	F300S3.0	127	168.3	90.7	117	210	41	30.2	2	3	22.23	8XM20	6.10	BK12
4	100	F300S4.0	157.2	200	116.1	146	255	46	33.3	2	3	22.23	8XM20	10.10	BK12
5	125	F300S5.0	185.7	235	143.8	178	280	49	36.5	2	6.5	22.23	8XM20	12.50	BK12
6	150	F300S6.0	215.9	269.9	170.7	206	320	51	39.7	2	6.5	22.23	12XM20	14.10	BK09

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Screwed and Blind flanges to this standard



We also keep Gaskets to suit all our Flanges in both EPDM and Non-Asbestos materials

