

PIPE SIZE	DN	CODE 316	CODE 304	A	B	C	D	E	F	G	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F1630.5	F1630.5-304	45	65	95	22	16	2	14	4XM12	0.68	BK03
3/4	20	F1630.75	F1630.75-304	58	75	105	27.5	18	2	14	4XM12	0.94	BK03
1	25	F1631.0	F1631.0-304	68	85	115	34.5	18	2	14	4XM12	1.11	BK03
1.25	32	F1631.25	F1631.25-304	78	100	140	43.5	18	2	18	4XM16	1.62	BK04
1.5	40	F1631.5	F1631.5-304	88	110	150	49.5	18	3	18	4XM16	1.86	BK04
2	50	F4032.0	-	102	125	165	61.5	20	3	18	4XM16	3.00	BK04
2 1/2	65	F4032.5	-	122	145	185	74.7	22	3	18	8XM16	3.80	BK07
3	80	F4033.0	-	138	160	200	90.5	24	3	18	8XM16	4.90	BK07
4	100	F4034.0	-	162	190	235	116	26	3	22	8XM20	6.50	BK10
5	125	F4035.0	-	188	220	270	141.5	28	3	22	8XM24	9.00	BK14
6	150	F4036.0	-	218	250	300	170.5	30	3	26	8XM24	13.20	BK14
8	200	F2538.0	F2538.0-304	278	310	360	221.5	32	3	26	12XM24	13.60	BK14
8	200	F4038.0	-	285	320	375	221.5	36	3	30	12XM27	20.00	BK16

* FOR 1-1/2" AND BELOW, PN25/40 ARE THE SAME DIMENSIONS AS PN16 AS SHOWN IN THE TABLE ABOVE *


** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

This flange conforms to EN 1092-1 and is available in both 316/L and 304/L for PN25 in 8".

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

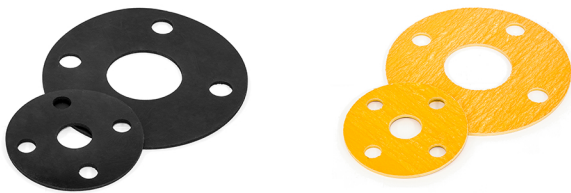

We also keep Blind and Threaded flanges to this standard

