


## 150LB REDUCING HOSE TAIL 316



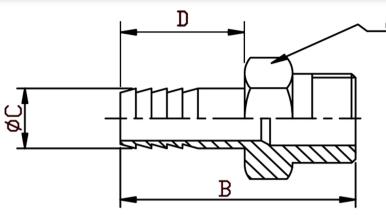


| SIZE          | CODE    |          | THREAD | DIMENSIONS |      |    |    |         |
|---------------|---------|----------|--------|------------|------|----|----|---------|
|               | BSP     | NPT      | IHKEAD | С          | Α    | В  | D  | KG EACH |
| 1/8 x 1/4     | RHT0204 | -        | 1/4    | 3.5        | 13.9 | 35 | 20 | 0.02    |
| 3/16 x 1/4    | RHT0304 | -        | 1/4    | 5          | 13.9 | 42 | 25 | 0.03    |
| 1/4 x 1/8     | RHT0402 | RHT0402N | 1/8    | 6.3        | 12   | 48 | 30 | 0.03    |
| 1/4 x 3/8     | RHT0406 | RHT0406N | 3/8    | 6.3        | 19   | 50 | 30 | 0.03    |
| 1/4 x 1/2     | RHT0408 | RHT0408N | 1/2    | 6.3        | 23   | 52 | 30 | 0.05    |
| 5/16 x 1/8    | RHT0502 | RHT0502N | 1/8    | 8          | 12   | 34 | 18 | 0.05    |
| 3/8 x 1/4     | RHT0604 | RHT0604N | 1/4    | 9.53       | 15   | 48 | 30 | 0.04    |
| 3/8 x 1/2     | RHT0608 | RHT0608N | 1/2    | 9.53       | 23   | 55 | 30 | 0.05    |
| 1/2 x 1/4     | RHT0804 | RHT0804N | 1/4    | 12.7       | 15   | 57 | 40 | 0.06    |
| 1/2 x 3/8     | RHT0806 | RHT0806N | 3/8    | 12.7       | 19   | 60 | 40 | 0.07    |
| 1/2 x 3/4     | RHT0812 | RHT0812N | 3/4    | 12.7       | 29   | 67 | 40 | 0.09    |
| 1/2 x 1       | RHT0816 | -        | 1      | 12.7       | 35   | 72 | 40 | 0.10    |
| 5/8 x 3/4     | RHT1012 | RHT1012N | 3/4    | 16         | 29   | 67 | 40 | 0.11    |
| 3/4 x 3/8     | RHT1206 | -        | 3/8    | 19.05      | 23   | 65 | 40 | 0.12    |
| 3/4 x 1/2     | RHT1208 | RHT1208N | 1/2    | 19.05      | 23   | 65 | 40 | 0.15    |
| 3/4 x 1       | RHT1216 | RHT1216N | 1      | 19.05      | 35   | 72 | 40 | 0.15    |
| 1 x 1/2       | RHT1608 | RHT1608N | 1/2    | 25.4       | 23   | 72 | 50 | 0.12    |
| 1 x 3/4       | RHT1612 | RHT1612N | 3/4    | 25.4       | 29   | 76 | 50 | 0.17    |
| 1 x 1-1/4     | RHT1620 | -        | 1-1/4  | 25.4       | 45   | 81 | 50 | 0.18    |
| 1 x 1-1/2     | RHT1624 | -        | 1-1/2  | 25.4       | 62   | 84 | 50 | 0.20    |
| 1-1/4 x 1     | RHT2016 | RHT2016N | 1      | 31.8       | 35   | 78 | 50 | 0.17    |
| 1-1/4 x 1-1/2 | RHT2024 | RHT2024N | 1-1/2  | 31.8       | 62   | 83 | 50 | 0.22    |
| 1-1/2 x 1     | RHT2416 | RHT2416N | 1      | 38.1       | 41   | 87 | 60 | 0.26    |
| 1-1/2 x 1-1/4 | RHT2420 | RHT2420N | 1-1/4  | 38.1       | 45   | 90 | 60 | 0.28    |
| 1-1/2 x 2     | RHT2432 | RHT2432N | 2      | 38.1       | 72   | 93 | 60 | 0.34    |
| 2 x 1-1/2     | RHT3224 | RHT3224N | 1-1/2  | 50.8       | 62   | 97 | 60 | 0.55    |

\*\* DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\*

NERO's range of Reducing Hose Tails are available threaded BSPT and NPT. They are made from high quality investment castings to ISO4144 or above.

BSP threads are to ISO 228-1 and 7-1 NPT threads are to ANSI B2.1 Made from 316 (CF8M) stainless steel

| TABLE 1: PRESSURE-TEMPERATURE RATING   |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
| TEMPERATURE<br>(°C)  | NO-SHOCK MAXIMUM<br>WORKING PRESSURE (Bar) |  |  |  |  |  |  |
| -20 to 40  | 20   |  |  |  |  |  |  |
| 100  | 16.5                                       |  |  |  |  |  |  |
| 150  | 15   |  |  |  |  |  |  |
| 200  | 14   |  |  |  |  |  |  |
| 220  | 13.5                                       |  |  |  |  |  |  |
| Note 1 Pressure for Intermediate temperatures may be determined by the interpolation method<br>Note 2 Temperatures indicated are those of the Internal fluid<br>Note 3 Piping loads, stresses And moments are not taken into account |  |  |  |  |  |  |  |







SAME DAY DISPATCH ORDERS PLACED BEFORE 4:30PM



