


| SIZE | PRODUCT CODE | | ORIFICE | A | B | C | C1 | D | E | CV FACTOR | KG EACH |
|------|--------------|---------|---------|----|----|------|-------|----|-----|-----------|---------|
| | BSPP | NPT | | | | | | | | | |
| 1/4 | 6RBV04 | 6RBV04N | 10.0 | 32 | 33 | 32 | 64 | 44 | 130 | 7.5 | 0.38 |
| 3/8 | 6RBV06 | 6RBV06N | 10.0 | 32 | 33 | 35.5 | 71 | 44 | 130 | 7.5 | 0.45 |
| 1/2 | 6RBV08 | 6RBV08N | 12.7 | 32 | 38 | 45 | 90 | 48 | 145 | 10 | 0.67 |
| 3/4 | 6RBV12 | 6RBV12N | 12.7 | 50 | 49 | 45 | 90 | 53 | 160 | 10 | 1.01 |
| 1 | 6RBV16 | 6RBV16N | 18.0 | 50 | 56 | 54.1 | 108.2 | 53 | 160 | 30 | 1.74 |

| S.NO. | COMPONENT | MATERIAL |
|-------|----------------|-----------------|
| 1 | VALVE BODY | 316 SS |
| 2 | BALL | 316 SS/A479 |
| 3 | STEM PACKING | PTFE |
| 4 | BALL SEAT | PTFE |
| 5 | CONNECTOR SEAL | VITON |
| 6 | CONNECTOR | 316 SS |
| 7 | STEM | 316 SS/A276 |
| 8 | HANDLE | VINYL |
| 9 | LOCK PIN | STAINLESS STEEL |
| 10 | WASHER | 316 SS/A276 |
| 11 | SCREW | STAINLESS STEEL |



Pressure vs. Temperature

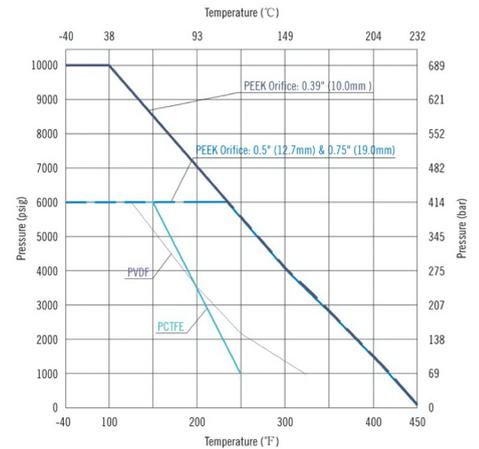

- Pressure up to 6,000 PSI (414 BAR) for standard series
- Temperature from -46C to 232°C with PTFE packing
- Free floating ball design provides seat wear compensation
- Bi-directional flow for 2-way valves
- Blow out resistant stem with self-sealing function
- 100% factory tested
- Also available with Compression Ends to suit Metric & Imperial sized Tube

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****



SAME DAY DISPATCH - ORDERS PLACED BEFORE 4:30PM



WEALTH OF INDUSTRY KNOWLEDGE



ONE OF THE LARGEST STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLA AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK