

CODE		ΦD (MM)	R (BSPT)	A	B	E	ΦP	H	WEIGHT (G)
PI-4MTTSM2BSPT	PI-4MTTSM2NPT	4	R1/8	8	34.8	20.5	9	14	21.5
PI-4MTTSM4BSPT	PI-4MTTSM4NPT		R1/4	11		24			25.5
PI-6MTTSM2BSPT	PI-6MTTSM2NPT	6	R1/8	8	42.2	21	11	14	24
PI-6MTTSM4BSPT	PI-6MTTSM4NPT		R1/4	11		25			35
PI-8MTTSM2BSPT	PI-8MTTSM2NPT	8	R1/8	8	44	23.9	13.7	14	32.5
PI-8MTTSM4BSPT	PI-8MTTSM4NPT		R1/4	11		27.4			36.5
PI-10MTTSM4BSPT	PI-10MTTSM4NPT	10	R1/4	11	49.2	28.5	15.5	17	49.5
PI-10MTTSM6BSPT	PI-10MTTSM6NPT		R3/8	11		29			57.5
PI-12MTTSM4BSPT	PI-12MTTSM4NPT	12	R1/4	11	57.6	30.5	18.7	19	65
PI-12MTTSM6BSPT	PI-12MTTSM6NPT		R3/8	11		31			74.5
PI-12MTTSM8BSPT	PI-12MTTSM8NPT		R1/2	14.5		34.5			90

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****

FEATURES

- Fast Connection
- High Temperature up to 150°C
- Small, compact design
- Good resistance to chemical corrosive environments
- Food safety
- Allow full flow through Hose / Tubing

MATERIAL CONSTRUCTION

- Metal Body - SS 316
- Push Button - SS 316
- Claws - SS301
- Seals - FKM

SPECIFICATIONS


- Operating Pressure - 0-20 BAR
- Operating Temperature - -20 to 150°C
- Vacuum Rating - To 28" Hg
- Application - Air, Vacuum, Steam Beverage, Oil
- Types - Tee

FITTINGS ADVANTAGE

- Easy to push in and pull out tubes
- Raw material is SS316L and seal is FKM, for high temp and corrosive environments
- 100% tested, no leakage



SSPB

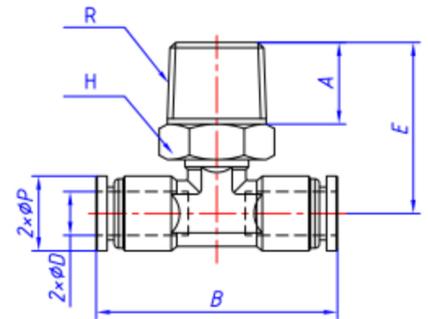

We also stock a range of Push-In fittings to work alongside these fittings



Applications:

- Pneumatics
- Air brake, fuel and lube applications
- Production lines (industrial and automotive)



5 STAR ★★★★★
CUSTOMER SERVICE



SAME DAY DISPATCH -
ORDERS PLACED BEFORE 4:30PM



WEALTH OF
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLo AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK