


REDUCING ADAPTOR FEMALE/MALE 316L

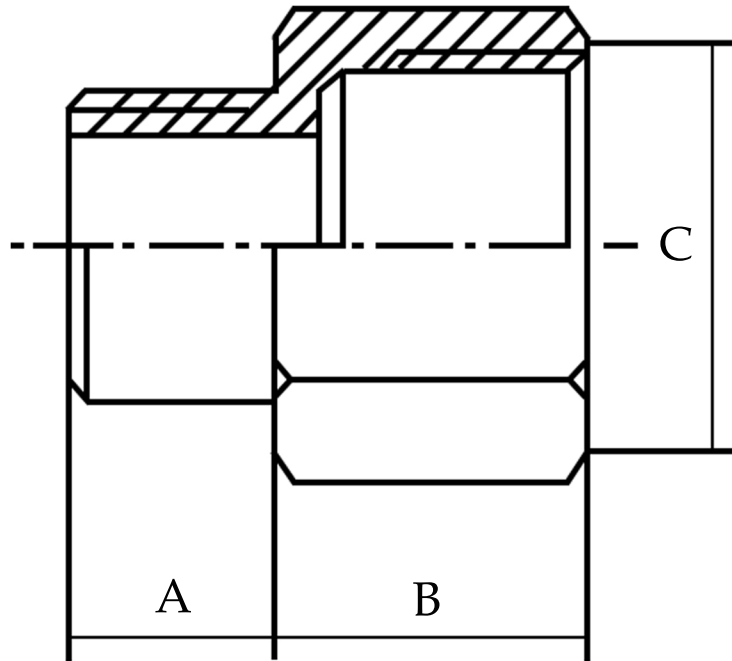

FEMALE BSPP	MALE BSPT	PART No	A	B	C	Kg/100
1/4	1/8	RAFM0402	8	15.0	16.0	1.5
3/8	1/4	RAFM0604	10.5	15.3	19.3	2.3
1/2	1/4	RAFM0804	10.5	18.4	23.8	3.7
1/2	3/8	RAFM0806	11	18.4	23.8	3.7
3/4	3/8	RAFM1206	11	19.3	29.5	5.0
3/4	1/2	RAFM1208	14.5	20.0	29.5	5.9
1	1/2	RAFM1608	14.5	22.6	36.6	8.8
1	3/4	RAFM1612	15.5	22.6	36.6	9.0
1-1/4	3/4	RAFM2012	15.5	25.4	45.6	13.8
1-1/4	1	RAFM2016	18	25.4	45.6	14.4
1-1/2	1	RAFM2416	18	25.7	52.2	17.1
1-1/2	1-1/4	RAFM2420	20.5	25.7	52.2	17.8
2	1-1/4	RAFM3220	20.5	29.6	63.9	26.7
2	1-1/2	RAFM3224	20.5	30.0	63.9	26.5

*Pressure rating up to 20 BAR (300 PSI)

*Male threads to ISO 7-1, Female threads to ISO 228-1

*316 CF8M stainless steel

*Investment castings

*Sizes 1/8" to 2"

DIMENSIONS SUBJECT TO CHANGE, PLEASE CONTACT US IF CRITICAL