

PIPE SIZE	DN	CODE 316	CODE 304	A	B	C	D	BOLT	BOLT KIT CODE	KG EACH
1/2	15	FEB0.5	FEB0.5-304	66.68	95.25	6.35	14.29	4XM12	BK02	0.35
3/4	20	FEB0.75	FEB0.75-304	73.03	101.6	6.35	14.29	4XM12	BK02	0.40
1	25	FEB1.0	FEB1.0-304	82.55	114.3	7.14	14.29	4XM12	BK02	0.60
1.25	32	FEB1.25	FEB1.25-304	87.31	120.65	7.94	14.29	4XM12	BK02	0.70
1.5	40	FEB1.5	FEB1.5-304	98.43	133.35	8.73	14.29	4XM12	BK02	0.94
2	50	FEB2.0	FEB2.0-304	114.3	152.4	9.53	17.46	4XM16	BK04	1.33
2.5	65	FEB2.5	FEB2.5-304	127	165.1	10.32	17.46	4XM16	BK04	1.70
3	80	FEB3.0	FEB3.0-304	146.05	184.15	11.11	17.46	4XM16	BK04	2.26
4	100	FEB4.0	FEB4.0-304	177.8	215.9	12.7	17.46	8XM16	BK05	3.60
5	125	FEB5.0	FEB5.0-304	209.55	254	14.29	17.46	8XM16	BK05	5.60
6	150	FEB6.0	FEB6.0-304	234.95	279.4	17.46	22.23	8XM20	BK10	8.30
8	200	FEB8.0	FEB8.0-304	292.1	336.55	19.05	22.23	8XM20	BK10	13.00
10	250	FEB10.0	FEB10.0-304	355.6	406.4	22.2	22.23	12XM20	BK11	22.50
12	300	FEB12.0	FEB12.0-304	406.4	457.2	25.4	25.4	12XM24	BK15	32.50


**\*\* DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\***

This flange conforms to ASTM A182 and is available in 316/L and 304/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

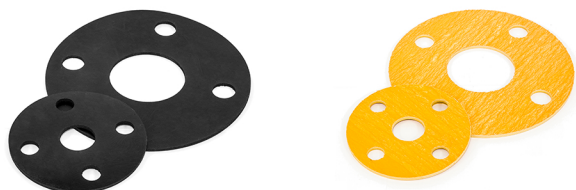

We also keep Slip-On and Threaded flanges to this standard

