

PIPE SIZE	DN	CODE BSPT	A	B	C	D	E	F	G	H	J	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F1640.5 BSPT	45	65	95	35	20	3	14	14	4	4XM12	0.61	BK03
3/4	20	F1640.75 BSPT	58	75	105	45	24	3	16	14	4	4XM12	0.91	BK03
1	25	F1641.0 BSPT	68	85	115	52	24	3	16	14	4	4XM12	1.10	BK03
1.25	32	F1641.25 BSPT	78	100	140	60	26	3	16	18	6	4XM16	1.60	BK04
1.5	40	F1641.5 BSPT	88	110	150	70	26	3	16	18	6	4XM16	1.78	BK04
2	50	F4042.0 BSPT	102	125	165	84	34	3	20	18	6	4XM16	2.74	BK04
2 1/2	65	F4042.5 BSPT	122	145	185	104	38	3	22	18	6	8XM16	3.65	BK07
3	80	F4043.0 BSPT	138	160	200	118	40	3	24	18	8	8XM16	4.60	BK07
4	100	F4044.0 BSPT	162	190	235	145	44	3	24	22	8	8XM20	6.10	BK10

* FOR 1-1/2" AND BELOW, PN25/40 ARE THE SAME DIMENSIONS AS PN16 AS SHOWN IN THE TABLE ABOVE *


** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **

This flange conforms to EN 1092-1 and is available in 316/L. The threads are BSPT to ISO 7/1.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

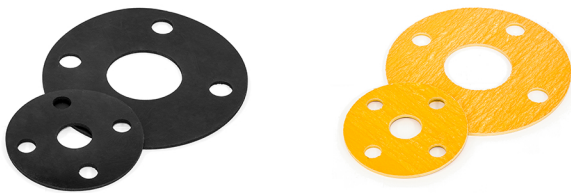

We also keep Blind and Slip-On flanges to this standard

