


PIPE SIZE	DN	CODE	A	B	C	D	E	F	G	H	J	K	BOLT	Kg	BOLT KIT CODE
1/2	15	F300S0.5	34.9	66.7	22.3	38	95	15.9	21	2	3	15.9	4XM12	0.7	BK03
3/4	20	F300S0.75	42.9	82.6	27.7	48	115	15.9	24	2	3	19.05	4XM16	1.1	BK06
1	25	F300S1.0	50.8	88.9	34.5	54	125	17.5	25	2	3	19.05	4XM16	1.4	BK06
1.25	32	F300S1.25	63.5	98.4	43.2	64	135	20.6	25	2	3	19.05	4XM16	1.8	BK06
1.5	40	F300S1.5	73	114.3	49.5	70	155	22.2	29	2	3	22.23	4XM20	2.6	BK17
2	50	F300S2.0	92.1	127	62	84	165	25.4	32	2	3	19.05	8XM16	3.4	BK07
2.5	65	F300S2.5	104.8	149.2	74.7	100	190	28.6	37	2	3	22.23	8XM20	4.4	BK12
3	80	F300S3.0	127	168.3	90.7	117	210	30.2	41	2	3	22.23	8XM20	6.1	BK12
4	100	F300S4.0	157.2	200	116.1	146	255	33.3	46	2	3	22.23	8XM20	10.1	BK12
5	125	F300S5.0	185.7	235	143.8	178	280	36.5	49	2	6.5	22.23	8XM20	12.5	BK12
6	150	F300S6.0	215.9	269.9	170.7	206	320	39.7	51	2	6.5	22.23	12XM20	14.1	BK09

This flange conforms to ANSI/ASME B16.5 and is available in 316/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

**Need a gasket?**  
We keep those too

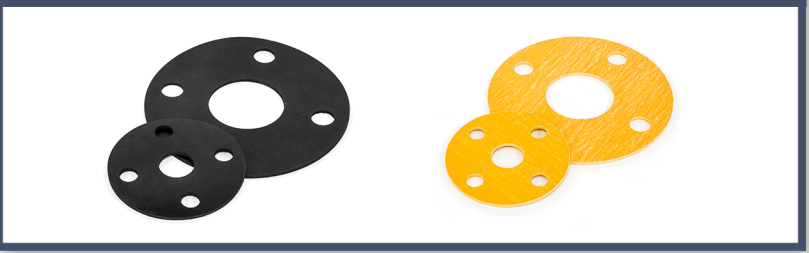

We also keep screwed and blind flanges to this standard

