

SIZE	CODE BSP	DIMENSIONS		
		I	K	KG EACH
1/8	UFMF02	29.1	43.5	0.09
1/4	UFMF04	29.1	45	0.11
3/8	UFMF06	34	50.5	0.15
1/2	UFMF08	37.5	53.5	0.16
3/4	UFMF12	44.5	61.5	0.23
1	UFMF16	53.5	70.4	0.40
1-1/4	UFMF20	64	75.8	0.54
1-1/2	UFMF24	71.5	82.4	0.72
2	UFMF32	85.5	91.2	1.06

**\*\* DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL \*\***

NERO's range of Male x Female PTFE Unions are available threaded BSPP x BSPT.

They are made from high quality investment castings to ISO4144 or above.

BSP threads are to ISO 228-1 and 7-1  
Made from 316 (CF8M) stainless steel

TABLE 1: PRESSURE-TEMPERATURE RATING


TEMPERATURE (°C)	NO-SHOCK MAXIMUM WORKING PRESSURE (Bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

Note 1 Pressure for Intermediate temperatures may be determined by the interpolation method

Note 2 Temperatures indicated are those of the Internal fluid

Note 3 Piping loads, stresses And moments are not taken into account

Not the union you are looking for? see below for more options

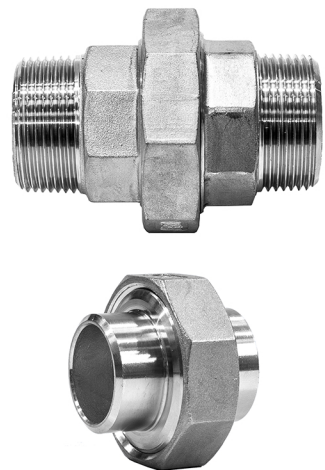

5 STAR ★★★★★  
CUSTOMER SERVICE



SAME DAY DISPATCH -  
ORDERS PLACED BEFORE 4:30PM



WEALTH OF  
INDUSTRY KNOWLEDGE



ONE OF THE LARGEST  
STOCKISTS IN THE UK

CALL: +44 (0)121 665 3900 EMAIL: INFO@NERO.CO.UK

UNIT 2, UNION RD, ANGLo AFRICAN INDUSTRIAL ESTATE, OLDBURY, WEST MIDLANDS B69 3EX

WWW.NERO.CO.UK