

PIPE SIZE	DN	SCHEDULE 10	SCHEDULE 40	A	B	C	D	E	F SCH10	F SCH40	G	H	J	K	L	M	BOLT	KG EACH	BOLT KIT CODE
1/2	15	F1620.5	F1620.5/40	45	65	21.3	32	95	17.3	15.8	14	35	3	14	3	6	4XM12	0.65	BK03
3/4	20	F1620.75	F1620.75/40	58	75	26.9	39	105	22.3	21.2	16	38	4	14	3	6	4XM12	0.95	BK03
1	25	F1621.0	F1621.0/40	68	85	33.7	46	115	28.5	26.9	16	38	4	14	3	6	4XM12	1.14	BK03
1.25	32	F1621.25	F1621.25/40	78	100	42.4	56	150	36.6	35.3	16	40	5	18	3	6	4XM16	1.69	BK04
1.5	40	F1621.5	F1621.5/40	88	110	48.3	64	150	43.1	40.9	16	42	5	18	3	7	4XM16	1.86	BK04
2	50	F4022.0	F4022.0/40	102	125	60.3	75	165	54.5	52.48	20	48	5	18	3	8	4XM16	2.92	BK04
2 1/2	65	F4022.5	F4022.5/40	122	145	76.1	90	185	70.3	65.78	22	52	6	18	3	10	8XM16	4.00	BK07
3	80	F4023.0	F4023.0/40	138	160	88.9	105	200	82.5	77.92	24	58	6	18	3	12	8XM16	5.10	BK07
4	100	F4024.0	F4024.0/40	162	190	114.3	134	235	107.1	102.26	24	65	6	22	3	12	8XM20	6.90	BK10
5	125	F4025.0	F4025.0/40	188	220	139.7	162	270	131.7	126.6	26	68	6	26	3	12	8XM24	9.50	BK14
6	150	F4026.0	F4026.0/40	218	250	168.3	192	300	159.3	154.08	28	75	8	26	3	12	8XM24	12.50	BK14
8	200	F4028.0	F4028.0/40	285	320	219.1	244	375	211.58	202.74	34	88	8	30	3	16	12XM28	22.00	BK16


FOR 1-1/2" AND BELOW, PN40 ARE THE SAME DIMENSIONS AS PN16 AS SHOWN IN THE TABLE ABOVE

This flange conforms to EN 1092-1 and is available in 316/L .

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

We also keep Gaskets to suit all our flanges in both EPDM and Non-Asbestos materials

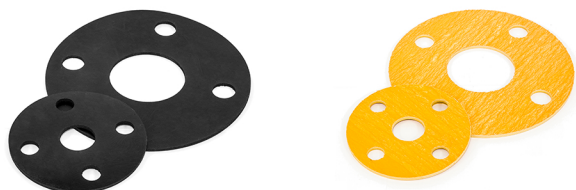

We also keep Slip-On, Blind and Threaded flanges to this standard

